

Evaluation Board

ESCON² EB Micro

with ESCON² Micro 60/5

Hardware Reference

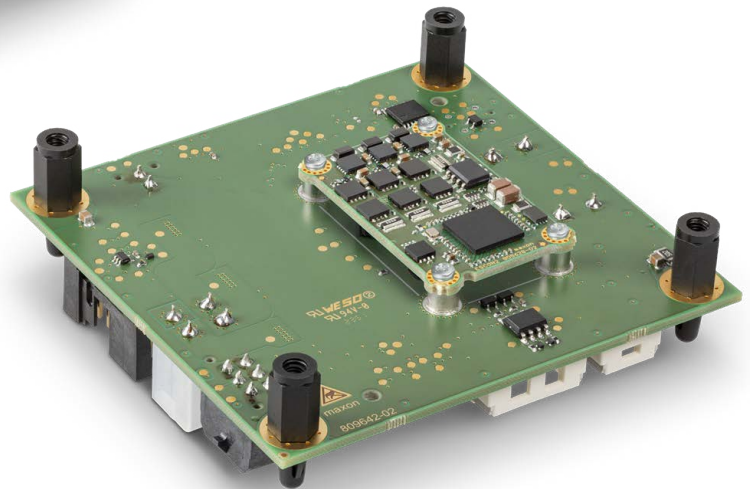
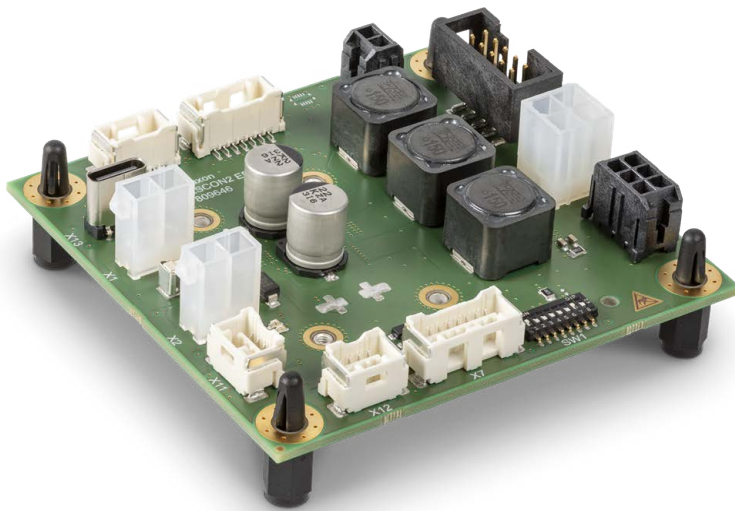


TABLE OF CONTENTS

1 ABOUT 5

1.1 About this document 5

1.2 About the devices 7

1.3 About the safety precautions 8

2 SPECIFICATIONS 9

2.1 Technical data 9

2.2 Thermal data 10

2.2.1 Test setup for data collection 10

2.2.4 Thermal accessories 12

2.3 Limitations and protections 14

2.4 Dimensional drawing 14

2.5 Standards 15

3 SETUP 17

3.1 Generally applicable rules 17

3.2 Connections 18

3.2.1 Cabling 18

3.3 Connection specifications 20

3.3.1 Power supply (X1) 20

3.3.2 Logic supply (X2) 21

3.3.3 Motor (X3) 22

3.3.4 Sensor 1 Hall sensor (X4) 23

3.3.5 Sensor 2 Encoder / I/Os (X5) 24

3.3.6 Digital I/Os (X7) 31

3.3.7 Analog I/Os (X8) 35

3.3.8 RS232 (X10) 37

3.3.9 CAN 1 (X11) & CAN 2 (X12) 38

3.3.10 USB (X13) 39

READ THIS FIRST

These instructions are intended for qualified technical personnel. Prior commencing with any activities...

- you must carefully read and understand this manual and
- you must follow the instructions given therein.

The ESCON2 EB Micro with ESCON2 Micro 60/5 is considered as partly completed machinery according to EU Directive 2006/42/EC, Article 2, Clause (g) and are intended to be incorporated into or assembled with other machinery or other partly completed machinery or equipment.

Therefore, you must not put the device into service,...

- unless you have made completely sure that the other machinery fully complies with the EU directive's requirements!
- unless the other machinery fulfills all relevant health and safety aspects!
- unless all respective interfaces have been established and fulfill the herein stated requirements!

3.3.11 Motor temperature sensor (X16) (future release) 40

3.4 DIP switch configuration (SW1). 42

3.4.1 CAN ID (Node-ID) 42

3.4.2 CAN automatic bit rate detection 44

3.4.3 CAN bus termination 44

3.5 Status indicators 44

4 WIRING 47

4.1 Possible combinations to connect a motor 47

4.2 Main wiring diagram 49

4.3 Excerpts 50

4.3.1 Power supply 50

4.3.2 Logic supply 50

4.3.3 DC motor 50

4.3.4 EC (BLDC) motor 50

4.3.5 Sensor 1 Hall sensor 51

4.3.6 Sensor 2 Encoder / I/Os 51

4.3.7 Digital I/Os 52

4.3.8 Analog I/Os 52

4.3.9 RS232 53

4.3.10 CAN 53

4.3.11 USB 54

4.3.12 Motor temperature sensor (future release) 54

LIST OF FIGURES 55

LIST OF TABLES 57

INDEX 59

••page intentionally left blank••

1 ABOUT


1.1 About this document

1.1.1 Intended purpose

This document familiarizes you with the ESCON2 EB Micro Evaluation Board, with the ESCON2 Micro 60/5 Servo Controller installed on it. It describes the tasks for safe and proper installation and commissioning. Follow the instructions:

- to avoid dangerous situations,
- to keep installation and/or commissioning time at a minimum,
- to increase reliability and service life of the described equipment.

This document is part of a documentation set. It includes performance data, specifications, standards information, connection details, pin assignments, and wiring examples. The overview below shows the documentation hierarchy and how its parts are related:

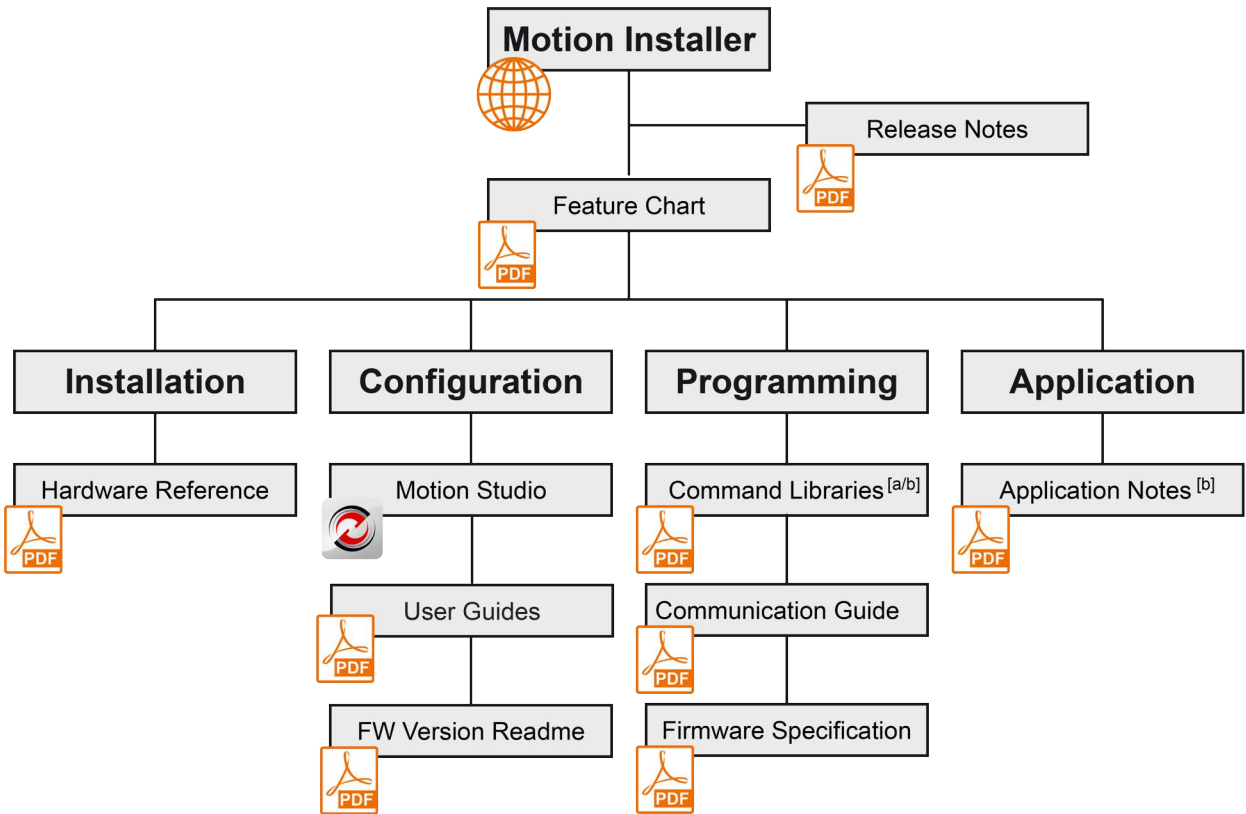

- [a] including software programming examples
[b] will be available with upcoming release

Figure 1-1 Documentation structure

Find the latest edition of this document, along with additional documentation and software for ESCON2 Servo Controllers, at: <http://escon.maxongroup.com>

1.1.2 Target audience

This document is intended for trained and skilled personnel. It provides information on how to understand and perform the respective tasks and duties.

1.1.3 How to use

Follow these notations and codes throughout the document.

Notation	Meaning
ESCON2	stands for «ESCON2 Servo Controller»
«Abcd»	indicating a title or a name (such as of document, product, mode, etc.)
(n)	refers to an item (such as a part number, list items, etc.)
*	refers to an internal value
➔	denotes “check”, “see”, “see also”, “take note of” or “go to”

Table 1-1 Notations used in this document

1.1.4 Symbols & signs

This document uses the following symbols and signs:









Type	Symbol	Meaning
Safety alert DANGER		Indicates an imminent hazardous situation . If not avoided, it will result in death or serious injury .
WARNING		Indicates a potential hazardous situation . If not avoided, it can result in death or serious injury .
CAUTION		Indicates a probable hazardous situation or calls the attention to unsafe practices. If not avoided, it may result in injury .
Prohibited action	 (typical)	Indicates a dangerous action. Hence, you must not!
Mandatory action	 (typical)	Indicates a mandatory action. Hence, you must!
Requirement, Note, Remark		Indicates an activity you must perform prior to continuing, or gives information on a particular point that must be observed.
Best practice		Indicates an advice or recommendation on the easiest and best way to further proceed.
Material Damage		Indicates information particular to possible damage of the equipment.

Table 1-2 Symbols and signs

1.1.5 Trademarks and brand names

For easier reading, the registered brand names below are not marked with their trademarks. Understand that these brands are protected by copyright and other intellectual property rights, even if trademarks are not shown later in this document.

Brand Name	Trademark Owner
Adobe® Reader®	© Adobe Systems Incorporated, USA-San Jose, CA
BiSS	© iC-Haus GmbH, DE-Bodenheim
CANopen® CiA®	© CiA CAN in Automation e.V, DE-Nuremberg
Windows®	© Microsoft Corporation, USA-Redmond, WA

Table 1-3 Brand names and trademark owners

1.1.6 Copyright

© 2024 maxon. All rights reserved. Any use, in particular reproduction, editing, translation, and copying, without prior written approval is not permitted (contact: maxon international ltd., Brünigstrasse 220, CH-6072 Sachseln, +41 41 666 15 00, www.maxongroup.com). Infringements will be prosecuted under civil and criminal law. The mentioned trademarks belong to their respective owners and are protected under trademark laws. Subject to change without prior notice.

CCMC | ESCON2 EB Micro Hardware Reference | Edition 2024-12 | DocID rel12662

1.2 About the devices

The ESCON2 EB Micro Evaluation Board is for commissioning and evaluating the ESCON2 Micro 60/5 Servo Controller. It has industrial connectors compatible with maxon prefab cables. However, it is not for regular use.

The ESCON2 Micro 60/5 (P/N 809631) is a small, powerful 4-quadrant PWM Servo Controller. Its high power density allows flexible use for brushed DC motors and brushless EC (BLDC) motors up to 300 Watts. It supports various feedback options, such as Hall sensors, incremental encoders, and absolute sensors for many drive applications.

The device is designed to be controlled by analog and digital set values, or as a slave node in a CANopen network. You can also operate it via any USB or RS232 communication port of a Windows workstation. It has extensive analog and digital I/O functions.

It uses the latest technology, such as field-oriented control (FOC) and acceleration/velocity feed forward, with high control cycle rates for easy and advanced motion control.

1.3 About the safety precautions

- Read and understand the note → «READ THIS FIRST»!
- Do not start any work unless you have the required skills → Chapter “1.1.2 Target audience” on page 1-5!
- Refer to → Chapter “1.1.4 Symbols & signs” on page 1-6 to understand the subsequently used indicators!
- Follow all applicable health, safety, accident prevention, and environmental protection regulations for your country and work site.



DANGER

High voltage and/or electrical shock

Touching live wires can cause death or serious injuries.

- *Treat all power cables as live unless proven otherwise.*
- *Ensure neither end of the cable is connected to live power.*
- *Ensure the power source cannot be turned on while you work.*
- *Follow lock-out/tag-out procedures.*



Requirements

- *Install all devices and components according to local regulations.*
- *Electronic devices are not fail-safe. Ensure any machine has independent monitoring and safety equipment. If the machine breaks down, is operated incorrectly, or if the control unit or cables fail, etc. the drive system must return to and stay in a safe mode.*
- *Do not repair any components supplied by maxon.*



Electrostatic sensitive device (ESD)

- *Observe precautions for handling Electrostatic sensitive devices.*
- *Handle the device with care.*

2 SPECIFICATIONS

2.1 Technical data

ESCON2 EB Micro (P/N 809646) with ESCON2 Micro 60/5 (P/N 809631)		
Electrical data	Nominal power supply voltage V_{CC}	10...60 VDC
	Nominal logic supply voltage V_C	10...60 VDC
	Absolute supply voltage V_{min} / V_{max}	8 VDC / 62 VDC
	Output voltage (max.)	$0.95 \times V_{CC}$
	Output current $I_{cont} / I_{max} (< 4 \text{ s})$	5 A / 15 A
	Pulse Width Modulation (PWM) frequency	50 kHz
	Sampling rate PI current controller	50 kHz
	Sampling rate PI speed controller	10 kHz
	Sampling rate analog input	50 kHz
	Max. efficiency	97.5 % → Figure 2-5
	Max. speed DC motor	limited by max. permissible motor speed and max. output voltage (controller)
	Max. speed EC motor (FOC)	120'000 rpm (1 pole pair)
	Built-in motor choke per phase	15 uH / 5 A
Inputs & outputs	Sensor 1 Digital Hall sensor H1, H2, H3	0...24 VDC (internal pull-up)
	Sensor 2 (choice between multiple functions): • Digital incremental encoder • SSI absolute encoder [a] • BISS C unidirectional absolute encoder [a] • High-speed digital inputs 1...2 • High-speed digital inputs 3...4 • High-speed digital output 1	2-channel, EIA/RS422, max. 6.67 MHz 0.1...2 MHz (single-ended, configurable) 0.1...4 MHz (single-ended, configurable) EIA/RS422, max. 6.67 MHz Logic: 0...12 VDC, max. 6.25 MHz 3.3 VDC / $I_L \leq 24 \text{ mA}$ / $R_i = 75 \Omega$
	Digital Inputs 1...4	Logic: 0...25 VDC, inputs 1...2 PWM capable
	Digital Outputs 1...2	max. 30 VDC / $I_L \leq 500 \text{ mA}$ (open drain with internal pull-up)
	Analog Inputs 1...2	Resolution 12-bit, $\pm 10 \text{ VDC}$ (differential), 10 kHz
	Analog Outputs 1...2	Resolution 12-bit, $\pm 4 \text{ VDC}$ (referenced to GND), 25 kHz
	Motor temperature sensor [a]	Resolution 12-bit, 0...3.3 VDC (internal pull-up)
Voltage outputs	Sensor supply voltage V_{Sensor}	5 VDC / $I_L \leq 145 \text{ mA}$
	Peripheral supply voltage $V_{Peripheral}$	-
Motor connections	DC motor	+ Motor, – Motor
	EC motor	Motor winding 1, Motor winding 2, Motor winding 3

Continued on next page.

ESCON2 EB Micro (P/N 809646) with ESCON2 Micro 60/5 (P/N 809631)			
Communi- cation interfaces	CAN		Max. 1 Mbit/s
	RS232		Max. 115'200 bit/s
	USB		12 Mbit/s (Full Speed)
Status indicators	Device status		Operation (green) Warning/Error (red)
Mechanical data	Dimensions (L × W × H)		75.6 × 72 × 24.4 mm
	Weight (approx.)	Evaluation Board	56 g
		with Controller	62 g
	Mounting		mounting holes ø4 mm with mounted spacers
Environmental conditions	Temperature	Operation	−30...+50 °C
		Extended range [b]	+50...+70 °C Derating: approx. -0.227 A/°C →Figure 2-2 with additional heatsink: →Figure 2-3
		Storage	−40...+85 °C
	Altitude [c]	Operation	0...500 m MSL
		Extended range [b]	500...10'000 m MSL Derating →Figure 2-2
	Humidity		5...90 % (condensation not permitted)

- [a] The functionality will be available with a future firmware release.
- [b] Operation within the extended range is permitted. However, a respective derating (declination of output current I_{cont}) as to the stated values will apply.
- [c] Operating altitude in meters above Mean Sea Level, MSL.

Table 2-4 Technical data

2.2 Thermal data



- Mandatory operation within the specified limits**
- Operation within the specified thermal limits is mandatory.
 - If the ambient temperature exceeds the specified limits, thermal overload can occur even at low output currents.

2.2.1 Test setup for data collection

Unless stated otherwise, maxon generated the thermal data using the ESCON2 EB Micro (P/N 809646) with the ESCON2 Micro 60/5 (P/N 809631) installed. This configuration simulates mounting on a customer-specific mother-board. The assembly is positioned upright with the connections of the Evaluation Board facing upward and the Micro on the bottom. It was placed on thermally poorly conductive holders, effectively floating in air.

2.2.2 Derating of output current (operation without additional heat sink)

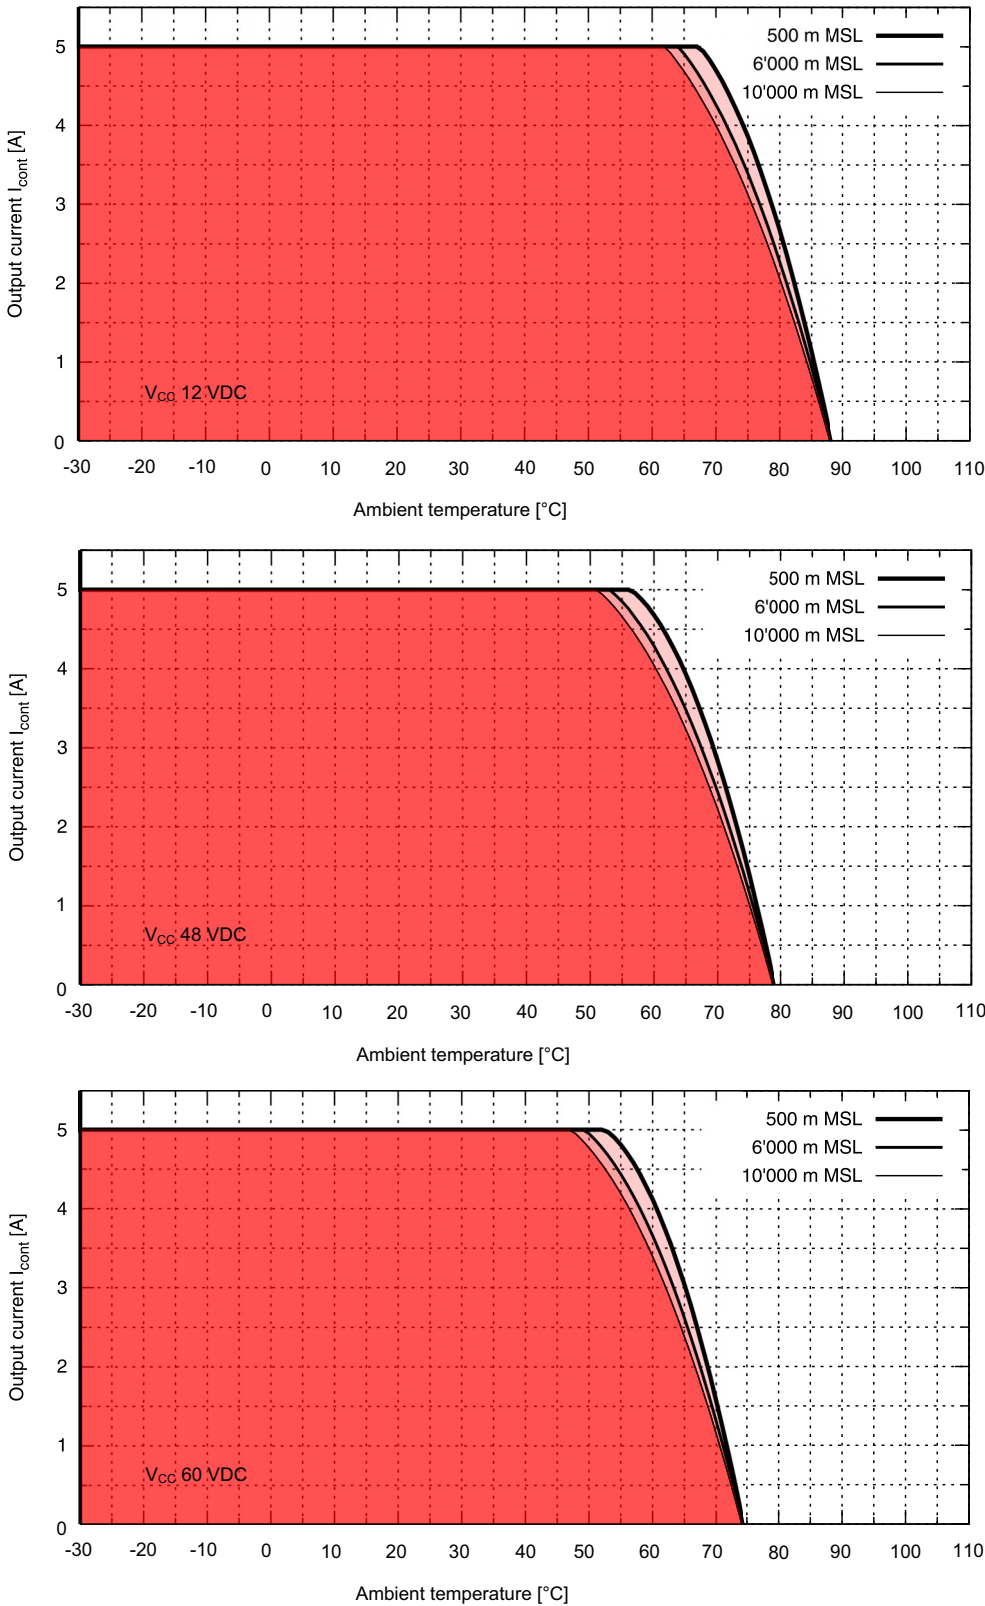


Figure 2-2 Derating of output current (operation without additional heatsink)

2.2.3 Operation with additional heatsink

During data collection in this chapter, the assembly was placed on its side. This position allows heat to flow upward from the additional heatsink, promoting effective passive cooling at the top.

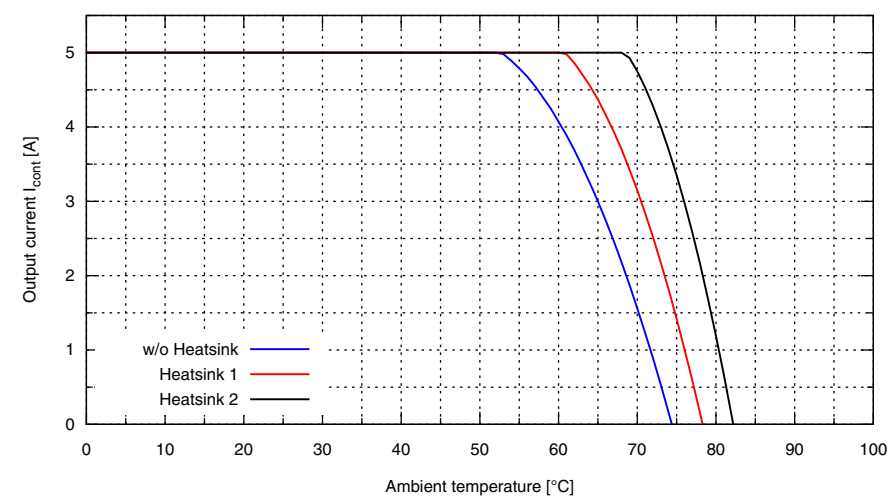


Figure 2-3 Extended operation @ V_{CC} 60 VDC with additional heatsink

Heatsink	Manufacturer	Type	Dimensions [mm]	Thermal resistance R _{th} [K/W]
1	Fischer Elektronik GmbH	SK 473 37,5 SA	37.5 × 27 × 6	19
2	Fischer Elektronik GmbH	SK 566 37,5 SA	37.5 × 27 × 22	6

Table 2-5 Heatsink – tested components


2.2.4 Thermal accessories

maxon offers the ESCON2 Micro 60/5 Thermal Accessory Kit (P/N 841890), consisting of a thermal pad and a mounting frame. Both fit the ESCON2 Micro 60/5 perfectly.

Specifications			
ESCON2 EB Micro Thermal Pad	Dimensions (L × W × H)	26 × 19 × 2.54 mm	
	Mounting	n/a (placed between controller and structure)	
	Thermal conductivity	2.4 W/(mK)	
ESCON2 EB Micro Mounting Frame	Dimensions (L × W × H)	37.4 × 24.4 × 4.1 mm	
	Mounting	4 holes ø2.2 mm	

Table 2-6 Thermal accessories – specification

CAD files are available on the maxon website as part of the ESCON2 Micro 60/5 Thermal Accessory Kit (P/N 841890).

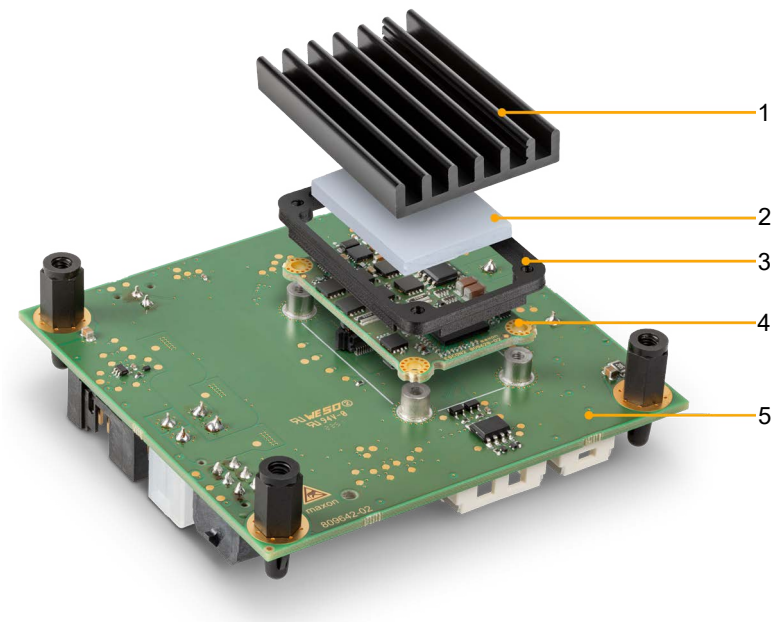

- | | | | |
|---|-----------------|---|-------------------|
| 1 | Heatsink [a] | 2 | Thermal Pad |
| 3 | Mounting Frame | 4 | ESCON2 Micro 60/5 |
| 5 | ESCON2 EB Micro | | |

[a] The heatsink is not part of the accessory kit and shown for illustration purposes only.

Figure 2-4 Assembly with thermal accessories

2.2.5 Power dissipation and efficiency

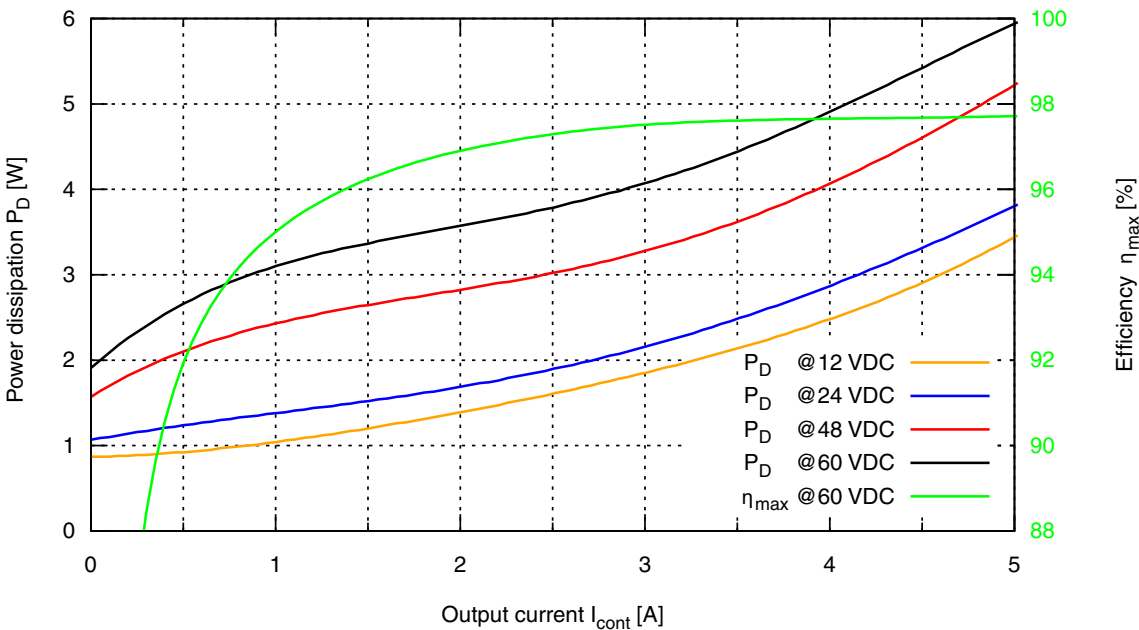


Figure 2-5 Power dissipation and efficiency

2.3 Limitations and protections

Functionality		Switch-off threshold	Recovery threshold
Undervoltage		7.5 VDC	7.75 VDC
Overvoltage		65 VDC	64 VDC
Thermal overload	logic	115 °C	105 °C
	power stage	100 °C	—

Table 2-7 Limitations and protections

The device has a configurable output current limit and an overcurrent protection function. This protects the controller in case of a short circuit in a motor winding or a damaged power stage. The undervoltage, overvoltage, and thermal overload power stage protection limits are also configurable. For more information, see the «ESCON2 Firmware Specification».

2.4 Dimensional drawing

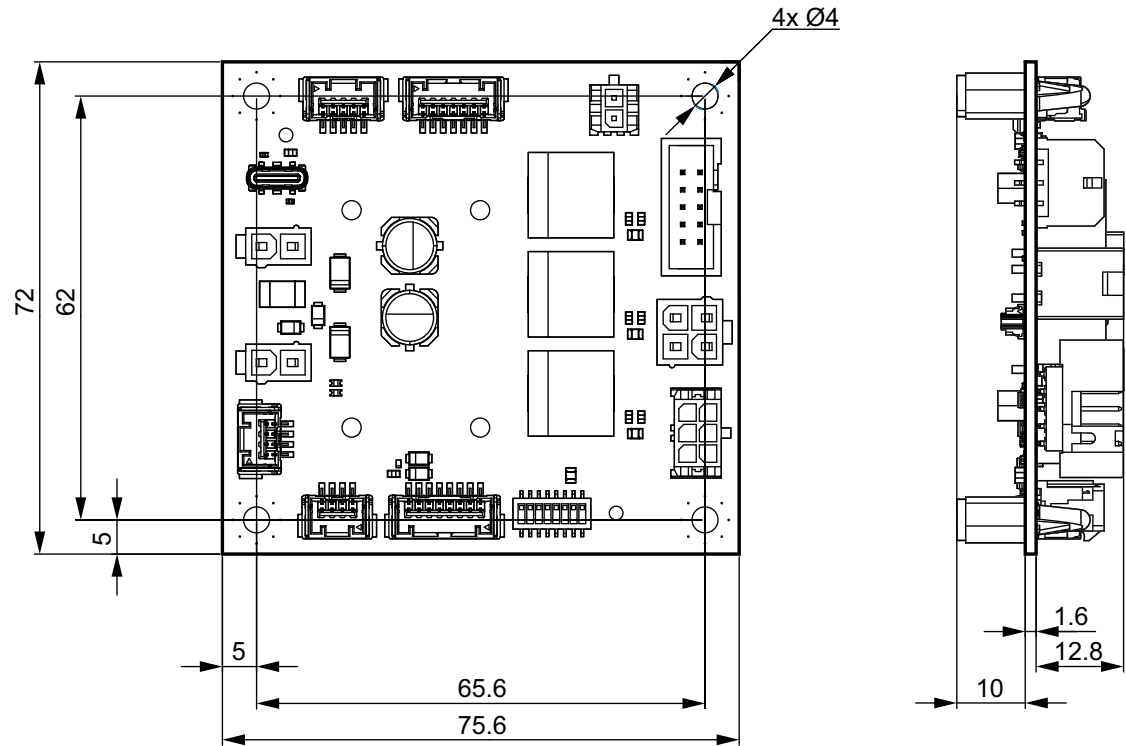


Figure 2-6 Dimensional drawing [mm]

2.5 Standards

The described device has been successfully tested for compliance with the standards listed below. Only the complete system (fully operational equipment with all components, such as the motor, servo controller, power supply unit, EMC filter, and cabling) can undergo an EMC test to ensure interference-free operation.



Important Notice

Compliance of the device with the mentioned standards does not guarantee compliance in the final, ready-to-operate setup. To achieve compliance for your operational system, you must perform EMC testing on the complete equipment as a whole.

Electromagnetic compatibility		
Generic	IEC/EN 61000-6-2	Immunity for industrial environments
	IEC/EN 61000-6-3	Emission standard for residential, commercial and light-industrial environments
Applied	IEC/EN 55022 (CISPR32)	Radio disturbance characteristics / radio interference
	IEC/EN 61000-4-3	Radiated, radio-frequency, electromagnetic field immunity test >10 V/m
	IEC/EN 61000-4-4	Electrical fast transient/burst immunity test ± 2 kV
	IEC/EN 61000-4-6	Immunity to conducted disturbances, induced by radio-frequency fields 10 Vrms

Others		
Environment	IEC/EN 60068-2-6	Environmental testing – Test Fc: Vibration (sinusoidal, 10...500 Hz, 20 m/s ²)
	MIL-STD-810F	Random transport (10...500 Hz up to 2.53 g _{rms})
Safety	UL File Number	Unassembled printed circuit boards: E207844
Reliability	MIL-HDBK-217F [a]	Only ESCON2 Micro 60/5: Reliability prediction of electronic equipment Environment: Ground, benign (GB) Ambient temperature: 298 K (25 °C) Component stress: In accordance with circuit diagram and nominal power Mean Time Between Failures (MTBF): 347'202 hours

[a] The reliability calculation is based on MIL-HDBK-217F. Since component manufacturer data is more accurate, it has been used whenever possible.

Table 2-8 Standards

••page intentionally left blank••

3 SETUP

IMPORTANT NOTICE: PREREQUISITES FOR INSTALLATION PERMISSION

The **ESCON2 EB Micro Evaluation Board with ESCON2 Micro 60/5** is considered partly completed machinery according to EU Directive 2006/42/EC, Article 2, Clause (g). **It is intended to be incorporated into or assembled with other machinery or partly completed machinery or equipment.**



WARNING

Risk of injury

Operating the device without full compliance of the surrounding system with EU Directive 2006/42/EC may cause serious injuries.

- Do not operate the device unless you are certain that the other machinery fully complies with the EU directive's requirements.
- Do not operate the device, unless the other machinery fulfills all relevant health and safety aspects!
- Do not operate the device unless all respective interfaces have been established and fulfill the requirements stated in this document!



CAUTION

Burn Hazard

Hot surfaces can cause burns.

- During operation, some parts of the device become very hot. Contact with these parts can burn your skin.
- Disconnect the power supply and secure it. Wait for the surface to cool before you do maintenance.

3.1 Generally applicable rules



Maximum permitted supply voltage

- Make sure that the supply power is between 10...60 VDC.
- Supply voltages above 65 VDC or incorrect polarity will destroy the unit.
- The necessary output current depends on the load torque. The output current limits are:
 - continuous max. 5 A
 - short-time (acceleration) max. 15 A (< 4 s)



Hot plugging the USB interface may cause hardware damage

If the USB interface is being hot-plugged (connecting while the power supply is on), the possibly high potential differences of the two power supplies of controller and PC/Notebook can lead to damaged hardware.

- Avoid potential differences between the power supply of controller and PC/Notebook or, if possible, balance them.
- Insert the USB connector first, then switch on the power supply of the controller.



Best practice

Keep the motor mechanically disconnected during the setup and adjustment phase.

3.2 Connections

For in-depth details on connections →Chapter “3.3 Connection specifications” on page 3-20.

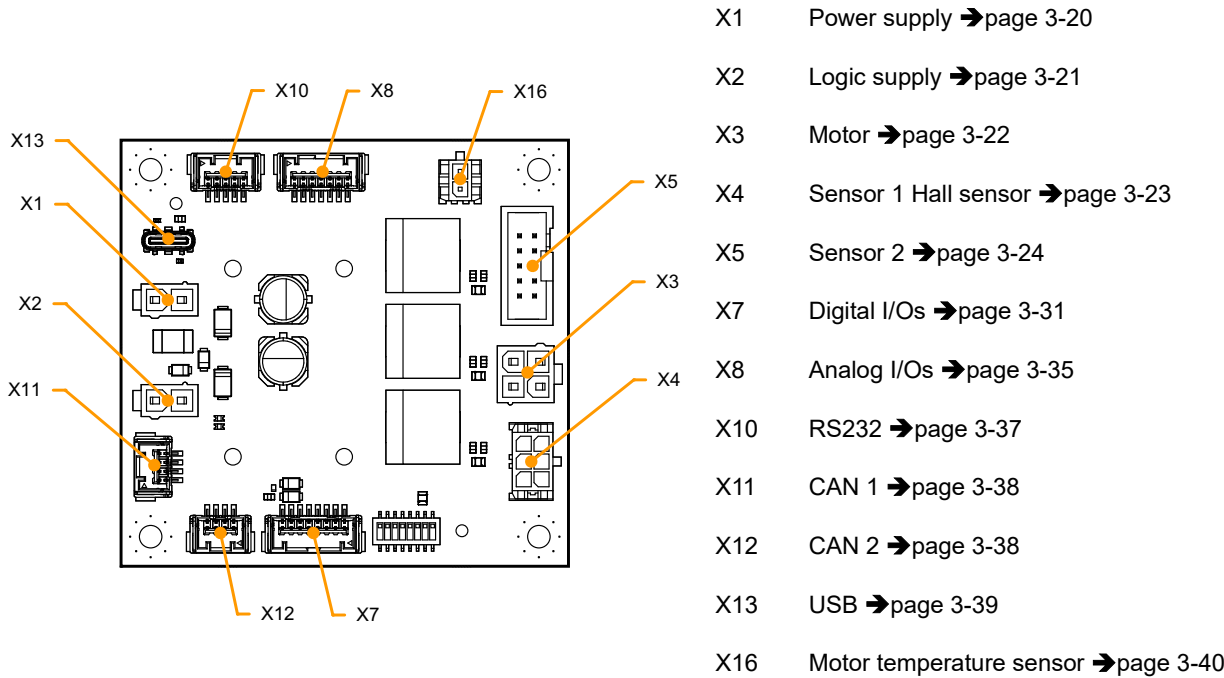


Figure 3-7 Connections

3.2.1 Cabling

PLUG&PLAY

Take advantage of maxon’s prefab cable assemblies. They come as ready-to-use parts and will help to reduce commissioning time to a minimum.

- a) Check the following table and find the part number of the cable assembly that matches the setup you will be using.
- b) Follow the cross-reference to get the cable’s pin assignment.

Prefab cable assembly			
Connector	Designation	Part Number	→Page
X1 / X2	Power cable Optional for separate logic supply!	275829	3-22
X3	Motor cable	275851	3-23
X4	Hall sensor cable	275878	3-23
X5	Encoder cable	275934	3-29
X7	Signal cable 8core	520853	3-32
X8	Signal cable 7core	520854	3-35
X10	RS232-COM cable	520856	3-37
X11	CAN-CAN cable	520858	3-38
	CAN-COM cable	520857	3-39
X12	CAN-CAN cable	520858	3-38
	CAN-COM cable	520857	3-39
X13	USB Type C – Type C cable	845854	3-40
	USB Type A – Type C cable	838461	3-40
X16	NTC cable	847301	3-41

Table 3-9 Prefab maxon cables

MAKE&BAKE YOUR OWN

If you decide not to employ maxon's prefab cable assemblies, you might wish to use the prepackaged kit that contains all connectors required to make up your own cabling.

Motion connector set (P/N 846644)		
Connector	Specification	Quantity
Connectors		
X1 / X2	Molex Mini-Fit Jr., 2 poles (39012020)	2
X3	Molex Mini-Fit Jr., 4 poles (39012040)	1
X4	Molex Micro-Fit 3.0, 6 poles (430250600)	1
X7	Molex CLIK-Mate, 8 poles (5025780800)	1
X8	Molex CLIK-Mate, 7 poles (5025780700)	1
X10	Molex CLIK-Mate, 5 poles (5025780500)	1
X11 / X12	Molex CLIK-Mate, 4 poles (5025780400)	2
X16	Molex Micro-Fit 3.0, 2 poles (430250200)	1
Crimp Terminals		
X1 / X2 / X3	Molex Mini-Fit Plus, AWG16 (457503112 / 457503111)	8
X4 / X16	Molex Micro-Fit 3.0, AWG26-30 (430300010 / 430300004)	8
X7 / X8 / X10 / X11 / X12	Molex CLIK-Mate, AWG24-28 (5025790100 / 5025790000)	30

Table 3-10 Motion connector set – Content

TOOLS

Tool	Manufacturer	Part Number
Hand crimper for Mini-Fit Jr. crimp terminals	Molex	2002182200
Hand crimper for Micro-Fit 3.0 crimp terminals	Molex	0638190000
Hand crimper for CLIK-Mate crimp terminals	Molex	2002187400

Table 3-11 Recommended tools

3.3 Connection specifications

The actual connection depends on your drive system configuration and the type of motor you are using. Follow the description in the given order and choose the wiring diagram (→see page 4-49) that best suits your components.



How to read pin assignment tables

In the subsequent sections of the document, you will come across tables outlining the pin assignments. These tables provide information about the hardware connectors, their corresponding wired signals, the assigned pins, and details regarding the prefab cables that are available.

- The initial column provides the pin numbers for the connectors.
- The second column specifies the pin numbers for the corresponding end (Head A) of the prefab cable.
- The third column describes the core color of the prefab cable.
- The fourth column indicates the pin numbers for the other end (Head B) of the prefab cable.

3.3.1 Power supply (X1)




Figure 3-8 Power supply connector X1

X1 Pin	Prefab cable			Signal	Description
	Head A Pin	Cable color	Head B Pin		
1	1	black	–	GND	Ground
2	2	black	+	V _{CC}	Power supply voltage input (10...60 VDC)

Table 3-12 Power supply connector X1 – Pin assignment


Power cable (P/N 275829)			
<div><div>A</div></div>		<div><div>B</div></div>	
Cross-section	2 × 0.75 mm ² , grey		
Length	3 m		
Head A	Plug	Molex Mini-Fit Jr., 2 poles (39012020)	
	Contacts	Molex Mini-Fit Jr. female crimp terminals (457501112)	
Head B	Wire end sleeves 0.75 mm ²		

Table 3-13 Power cable

Power supply requirements	
Nominal output voltage V _{CC}	10...60 VDC
Absolute output voltage V _{CC}	min. 8 VDC / max. 62 VDC
Output current	Depending on load <ul style="list-style-type: none">• continuous max. 5 A• short-time (acceleration) max. 15 A (< 4 s)

Table 3-14 Power supply requirements

- 1) Use the formula below to calculate the required voltage under load.
- 2) Choose a power supply according to the calculated voltage. Thereby consider:
 - a) During braking of the load, the power supply must be capable of buffering the recovered kinetic energy (for example, in a capacitor).
 - b) If you are using an electronically stabilized power supply, make sure that the over current protection circuit is configured inoperative within the operating range.



The formula already takes the following into account:

- Maximum PWM duty cycle of 95 %
- Controller's max. voltage drop of 1 V @ 5 A

KNOWN VALUES:

- Operating torque M [mNm]
- Operating speed n [rpm]
- Nominal motor voltage U_N [Volt]
- Motor no-load speed at U_N ; n_O [rpm]
- Speed/torque gradient of the motor $\Delta n/\Delta M$ [rpm/mNm]

SOUGHT VALUE:

- Supply voltage V_{CC} [Volt]

SOLUTION:

$$V_{CC} \geq \left[\frac{U_N}{n_O} \cdot \left(n + \frac{\Delta n}{\Delta M} \cdot M \right) \cdot \frac{1}{0.95} \right] + 1 [V]$$

3.3.2 Logic supply (X2)




Figure 3-9 Logic supply connector X2

X2 Pin	Prefab cable			Signal	Description
	Head A Pin	Cable color	Head B Pin		
1	1	black	–	GND	Ground
2	2	black	+	V_C	Logic supply voltage input (10...60 VDC)

Table 3-15 Logic supply connector X2 – Pin assignment


Power cable (P/N 275829)		
<div><div>A</div><div>B</div></div>		
Cross-section	2 × 0.75 mm ² , grey	
Length	3 m	
Head A	Plug	Molex Mini-Fit Jr., 2 poles (39012020)
	Contacts	Molex Mini-Fit Jr. female crimp terminals (457501112)
Head B	Wire end sleeves 0.75 mm ²	

Table 3-16 Power cable

Logic supply requirements	
Nominal output voltage V _C	10...60 VDC
Absolute output voltage V _C	min. 8 VDC / max. 62 VDC
Min. output power	P _C min. 3 W

Table 3-17 Logic supply requirements

3.3.3 Motor (X3)

The controller is set to drive either maxon EC motor (BLDC, brushless DC motor) or maxon DC motor (brushed DC motor) with separated motor/encoder cable.




Figure 3-10 Motor connector X3



Best practice

Keep the motor mechanically disconnected during the setup and adjustment phase.

X3 Pin	Prefab cable			Signal	Description
	Head A Pin	Cable color	Head B Pin		
1	1	black		Motor winding 1	EC motor: Winding 1
				Motor (+M)	DC motor: Motor +
2	2	black		Motor winding 2	EC motor: Winding 2
				Motor (-M)	DC motor: Motor -
3	3	black		Motor winding 3	EC motor: Winding 3
				-	DC motor: DO NOT CONNECT
4	4	black		Motor shield	Cable shield

Table 3-18 Motor connector X3 – Pin assignment for maxon EC & DC motor


Motor cable (P/N 275851)			
<div><div>A</div><div></div></div>		<div><div>B</div></div>	
Cross-section	3 × 0.75 mm ² , shielded, grey		
Length	3 m		
Head A	Plug	Molex Mini-Fit Jr., 4 poles (39012040)	
	Contacts	Molex Mini-Fit Jr. female crimp terminals (45750)	
Head B	Wire end sleeves 0.75 mm ²		

Table 3-19 Motor cable

3.3.4 Sensor 1 Hall sensor (X4)




Figure 3-11 Sensor 1 Hall sensor connector X4

X4 Pin	Prefab cable			Signal	Description
	Head A Pin	Cable color	Head B Pin		
1	1	green		Hall sensor 1	Hall sensor 1 input
2	2	brown		Hall sensor 2	Hall sensor 2 input
3	3	white		Hall sensor 3	Hall sensor 3 input
4	4	yellow		GND	Ground
5	5	grey		V _{Sensor}	Sensor supply voltage output (5 VDC / I _L ≤ 145 mA)
6	6	black		Hall shield	Cable shield

Table 3-20 Hall sensor connector X4 – Pin assignment


Hall sensor cable (P/N 275878)			
<div><div>A</div><div><div>4</div><div>1</div></div><div></div></div>		<div><div>B</div></div>	
Cross-section	5 × 0.14 mm ² , shielded, grey		
Length	3 m		
Head A	Plug	Molex Micro-Fit 3.0, 6 poles (430250600)	
	Contacts	Molex Micro-Fit 3.0 female crimp terminals (430300010)	
Head B	Wire end sleeves 0.14 mm ²		

Table 3-21 Hall sensor cable



Important Notice

The maximum supply current of the sensor supply voltage output V_{Sensor} is in total 145 mA. It can be used for:

- Hall sensors →Chapter “3.3.4 Sensor 1 Hall sensor (X4)” on page 3-23
- Incremental encoders →Chapter “3.3.5.1 Incremental encoder” on page 3-26
- SSI / BiSS C encoders →Chapter “3.3.5.2 SSI / BiSS C unidirectional absolute encoder (future release)” on page 3-27
- High-speed digital I/Os →Chapter “3.3.6 Digital I/Os (X7)” on page 3-31
- Digital I/Os →Chapter “3.3.6 Digital I/Os (X7)” on page 3-31
- Other peripherals which need a 5 VDC supply.

All currents resulting from parts connected to the sensor supply voltage output V_{Sensor} must not exceed 145 mA in total.

Hall sensor	
Sensor supply voltage output V_{Sensor}	5 VDC
Max. Hall sensor supply current	145 mA (→refer to Important Notice)
Input voltage	0...24 VDC
Max. input voltage	24 VDC
Low-level input voltage	< 0.8 VDC
High-level input voltage	> 2.0 VDC
Internal pull-up resistor	2.7 k Ω (referenced to 5.45 VDC - 0.6 VDC)

Table 3-22 Sensor 1 Hall sensor specification

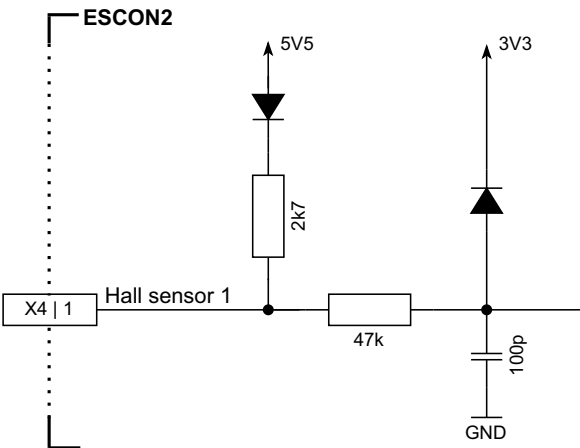


Figure 3-12 Sensor 1 Hall sensor input circuit (analogously valid for Hall sensors 2 & 3)

3.3.5 Sensor 2 Encoder / I/Os (X5)

Additional sensors, both incremental and serial encoders, or digital inputs and outputs can be connected. Only one sensor/function can be used at a time, i.e. either an incremental encoder, or an absolute encoder, or high-speed digital I/Os.



Best practice

For best performance and good resistance against electrical interference, **we recommend using encoders with a line driver (differential scheme)**. Otherwise, limitations may apply due to slow switching edges. Nevertheless, the controller supports both schemes – differential and single-ended (unsymmetrical).




Figure 3-13 Sensor 2 connector X5

X5 Pin	Prefab cable			Signal	Description
	Head A Pin	Cable color	Head B Pin		
1	1	brown	1	Data	Data (SSI, BiSS C)
				HsDigIN4	High-speed digital input 4
2	2	white	2	V _{Sensor}	Sensor supply voltage output (5 VDC / I _L ≤ 145 mA)
3	3	red	3	GND	Ground
4	4	white	4	Clock	Clock (SSI, BiSS C)
				HsDigOUT1	High-speed digital output 1
5	5	orange	5	Channel A\	Digital incremental encoder channel A complement
				HsDigIN1\	High-speed digital input 1 complement
6	6	white	6	Channel A	Digital incremental encoder channel A
				HsDigIN1	High-speed digital input 1
7	7	yellow	7	Channel B\	Digital incremental encoder channel B complement
				HsDigIN2\	High-speed digital input 2 complement
8	8	white	8	Channel B	Digital incremental encoder channel B
				HsDigIN2	High-speed digital input 2
9	9	green	9	–	not connected
10	10	white	10	HsDigIN3	High-speed digital input 3

Table 3-23 Sensor 2 connector X5 – Pin assignment

Encoder cable (P/N 275934)	
<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;"> A 1 2 </div> <div style="text-align: center;"> B 1 2 </div> </div>	
Cross-section	10 × AWG28, round-jacket, flat cable, pitch 1.27 mm
Length	3 m
Head A	DIN 41651 female, pitch 2.54 mm, 10 poles, with strain relief
Head B	DIN 41651 plug, pitch 2.54 mm, 10 poles, with strain relief

Table 3-24 Encoder cable



Important Notice

The maximum supply current of the sensor supply voltage output V_{Sensor} is in total 145 mA. It can be used for:

- Hall sensors →Chapter “3.3.4 Sensor 1 Hall sensor (X4)” on page 3-23
- Incremental encoders →Chapter “3.3.5.1 Incremental encoder” on page 3-26
- SSI / BiSS C encoders →Chapter “3.3.5.2 SSI / BiSS C unidirectional absolute encoder (future release)” on page 3-27
- High-speed digital I/Os →Chapter “3.3.6 Digital I/Os (X7)” on page 3-31
- Digital I/Os →Chapter “3.3.6 Digital I/Os (X7)” on page 3-31
- Other peripherals which need a 5 VDC supply.

All currents resulting from parts connected to the sensor supply voltage output V_{Sensor} must not exceed 145 mA in total.

3.3.5.1 Incremental encoder

Digital incremental encoder (differential)	
Sensor supply voltage output V_{Sensor}	5 VDC
Max. sensor supply current	$\leq 145\text{ mA}$ (→refer to Important Notice)
Min. differential input voltage	$\pm 200\text{ mV}$
Max. input voltage	$\pm 12\text{ VDC}$
Line receiver (internal)	EIA/RS422 standard
Max. input frequency	6.67 MHz

Table 3-25 Differential digital incremental encoder specification

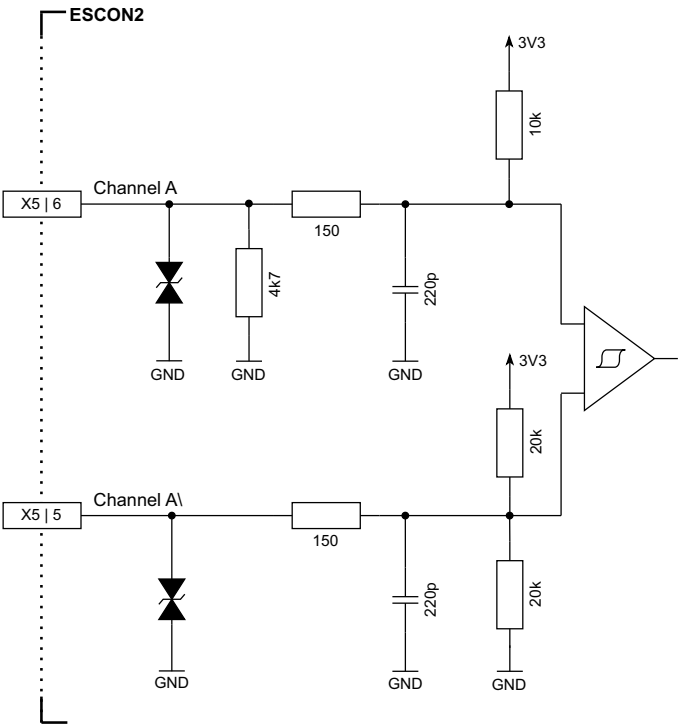


Figure 3-14 Digital incremental encoder input circuit Ch A “differential” (analogously valid for Ch B)

Digital incremental encoder (single-ended)		
Sensor supply voltage output V_{Sensor}		5 VDC
Max. sensor supply current		$\leq 145 \text{ mA}$ (→refer to Important Notice)
Input voltage		0...5 VDC
Max. input voltage		$\pm 12 \text{ VDC}$
Low-level input voltage		$< 1 \text{ VDC}$
High-level input voltage		$> 2.4 \text{ VDC}$
Input high current		I_{IH} = typically 1.3 mA @ 5 VDC
Input low current		I_{IL} = typically -0.36 mA @ 0 VDC
Max. input frequency	Push-pull	6.25 MHz
	Open collector	100 kHz (additional external 3k3 pull-up)

Table 3-26 Single-ended digital incremental encoder specification

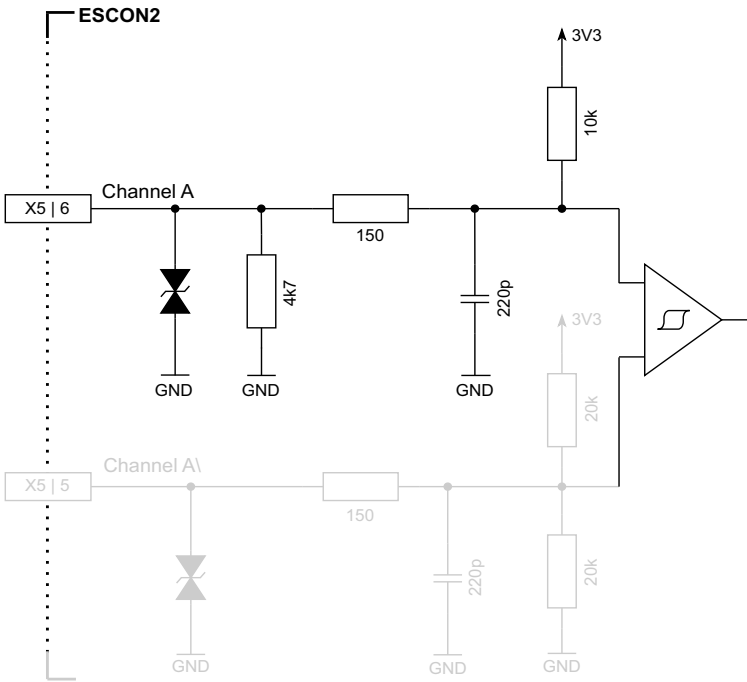


Figure 3-15 Digital incremental encoder input circuit Ch A “single-ended” (analogously valid for Ch B)

3.3.5.2 SSI / BiSS C unidirectional absolute encoder (future release)

The functionality will only be available with a future firmware release.

SSI / BiSS C unidirectional absolute encoder (single-ended)		
Sensor supply voltage output V_{Sensor}		5 VDC
Max. sensor supply current		$\leq 145 \text{ mA}$ (→refer to Important Notice)
Clock frequency	SSI	0.1...2 MHz
	BiSS C	0.1...4 MHz

Table 3-27 SSI / BiSS C unidirectional absolute encoder specification

SSI / BiSS C unidirectional absolute encoder data channel	
Input voltage	0...5 VDC
Max. input voltage	± 12 VDC
Low-level input voltage	< 1.0 VDC
High-level input voltage	> 2.4 VDC
Input high current	I_{IH} = typically 0.34 mA @ 5 VDC (→refer to Important Notice)
Input low current	I_{IL} = typically 0 mA @ 0 VDC (→refer to Important Notice)
Max. input frequency	6.25 MHz
Total reaction time	< 1.5 ms

Table 3-28 Single-ended SSI / BiSS C unidirectional absolute encoder data channel specification

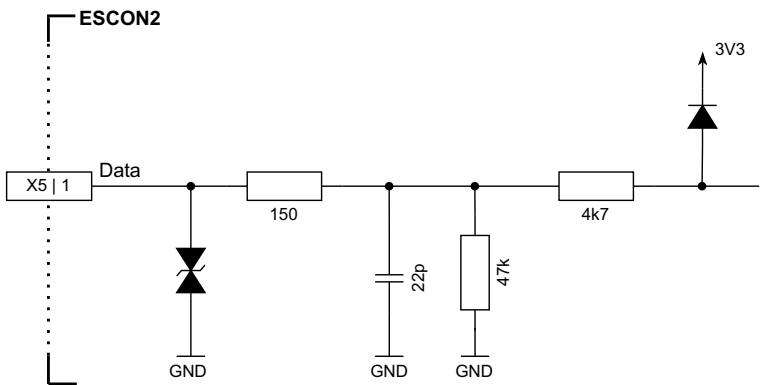


Figure 3-16 SSI absolute encoder data input (analogously valid for BiSS C)

SSI / BiSS C unidirectional absolute encoder clock channel		
Output voltage		3.3 VDC
Output resistance		47 Ω
Max. output current		24 mA
Clock frequency	SSI	0.1...2 MHz
	BiSS C	0.1...4 MHz

Table 3-29 Single-ended SSI / BiSS C unidirectional absolute encoder clock channel specification

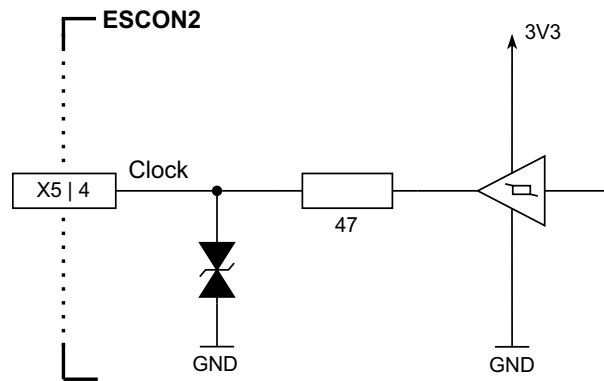


Figure 3-17 SSI absolute encoder clock output (analogously valid for BiSS C)

3.3.5.3 High-speed digital I/Os

Alternatively, the sensor interface can be used for high-speed digital I/O operation.



Encoder cable (P/N 275934)	
	
Cross-section	10 × AWG28, round-jacket, flat cable, pitch 1.27 mm
Length	3 m
Head A	DIN 41651 female, pitch 2.54 mm, 10 poles, with strain relief
Head B	DIN 41651 plug, pitch 2.54 mm, 10 poles, with strain relief

Table 3-30 Encoder cable

High-speed digital input 1...2 (differential)	
Max. input voltage	± 12 VDC
Min. differential input voltage	± 200 mV
Line receiver (internal)	EIA/RS422 standard
Max. input frequency	6.67 MHz
Total reaction time	< 1.5 ms

Table 3-31 Differential high-speed digital input specification

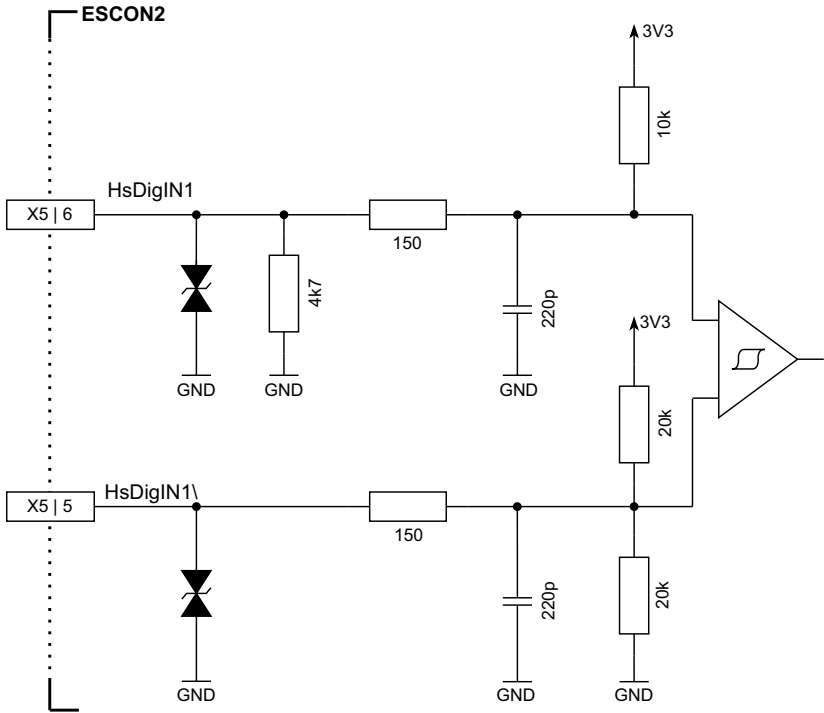


Figure 3-18 HsDigIN1 circuit “differential” (analogously valid for HsDigIN2)

High-speed digital input 1...4 (single-ended)		
Input voltage		0...5 VDC
Max. input voltage		± 12 VDC
Low-level input voltage		< 1.0 VDC
High-level input voltage		> 2.4 VDC
Input high current	HsDigIN1...3	I_{IH} = typically 1.3 mA @ 5 VDC (→refer to Important Notice)
	HsDigIN4	I_{IH} = typically 0.34 mA @ 5 VDC (→refer to Important Notice)
Input low current	HsDigIN1...3	I_{IL} = typically -0.36 mA @ 0 VDC (→refer to Important Notice)
	HsDigIN4	I_{IL} = typically 0 mA @ 0 VDC (→refer to Important Notice)
Max. input frequency		6.25 MHz
Total reaction time		< 1.5 ms

Table 3-32 Single-ended high-speed digital input specification

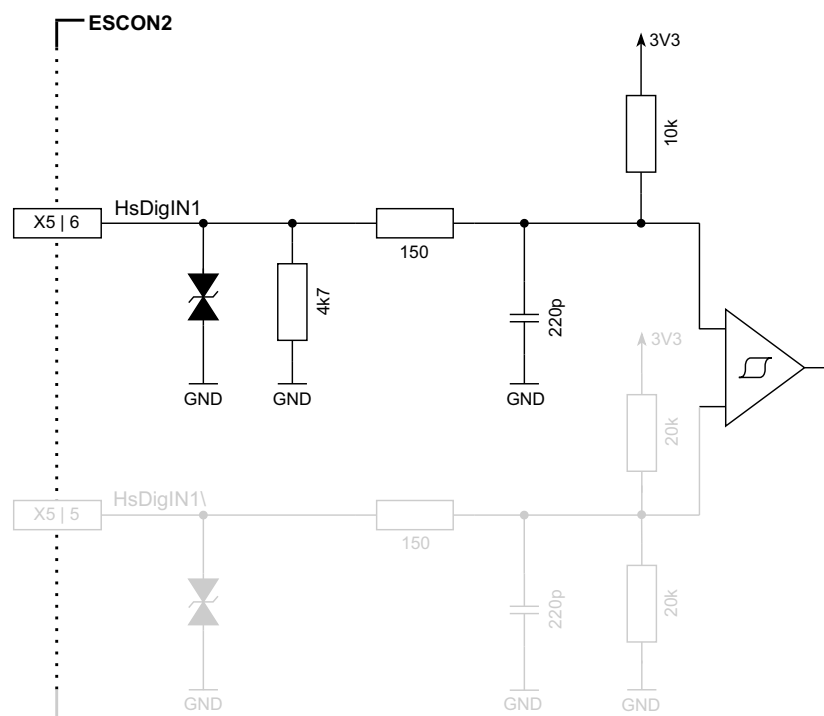


Figure 3-19 HsDigIN1 circuit "single-ended" (analogously valid for HsDigIN2...3)

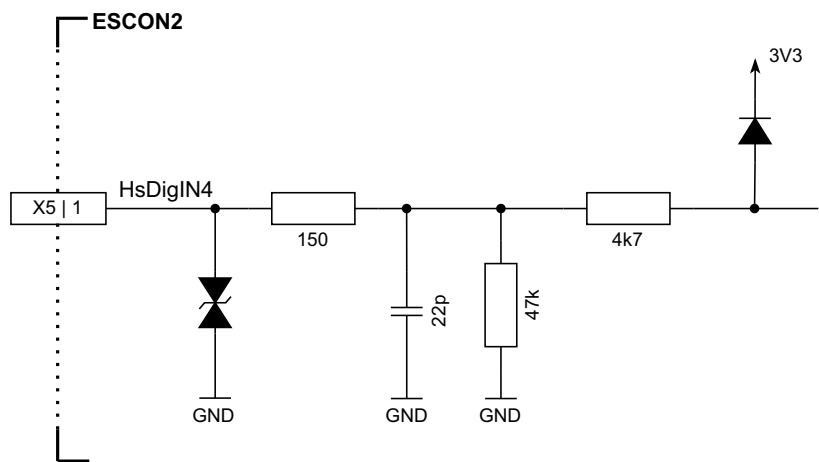


Figure 3-20 HsDigIN4 circuit “single-ended”

High-speed digital output 1	
Output voltage	3.3 VDC
Output resistance	47 Ω
Max. output current	24 mA
Max. output frequency	25 kHz

Table 3-33 High-speed digital output specification

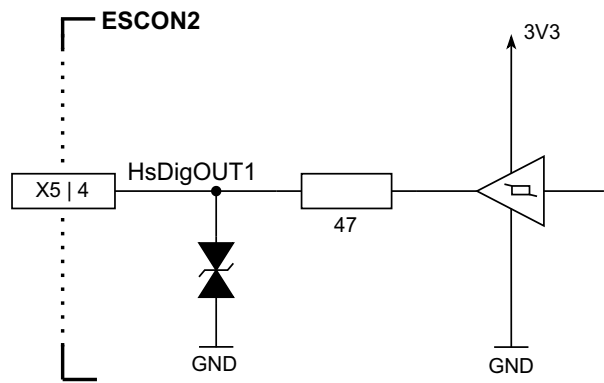


Figure 3-21 HsDigOUT1 circuit

3.3.6 Digital I/Os (X7)




Figure 3-22 Digital I/Os connector X7

X7 Pin	Prefab cable			Signal	Description
	Head A Pin	Cable color	Head B Pin		
1	1	white		DigIN1	Digital input 1
2	2	brown		DigIN2	Digital input 2
3	3	green		DigIN3	Digital input 3
4	4	yellow		DigIN4	Digital input 4
5	5	grey		DigOUT1	Digital output 1
6	6	pink		DigOUT2	Digital output 2
7	7	blue		GND	Ground
8	8	red		V _{IO}	V _{IO} = 5 VDC - 0.75 VDC = 4.25 VDC

Table 3-34 Digital I/Os connector X7 – Pin assignment


Signal cable 8core (P/N 520853)		
<div><div><div>A</div><div>8</div><div>1</div></div><div></div><div>B</div></div>		
Cross-section	8 × 0.14 mm ² , grey	
Length	3 m	
Head A	Plug	Molex CLIK-Mate, single row, 8 poles (5025780800)
	Contacts	Molex CLIK-Mate crimp terminals (5025790000)
Head B	Wire end sleeves 0.14 mm ²	

Table 3-35 Signal cable 8core

Digital inputs 1...2	
Input voltage	0...25 VDC
Max. input voltage	±25 VDC
Low-level input voltage	< 0.8 VDC
High-level input voltage	> 2.1 VDC
Input resistance	typically 47 kΩ < 3.3 VDC typically 37 kΩ @ 5 VDC typically 25 kΩ @ 24 VDC
Input current at logic 1	typically 135 µA @ 5 VDC
Hardware switching delay	< 6 µs
Total reaction time	< 2.3 ms
PWM duty cycle (resolution)	10...90 % (0.1 %)
PWM frequency	50 Hz...10 kHz
PWM accuracy	typically +0.1 % absolute @ 50 Hz / 5 VDC typically +1.5 % absolute @ 10 kHz / 5 VDC

Table 3-36 Digital inputs 1...2 specification

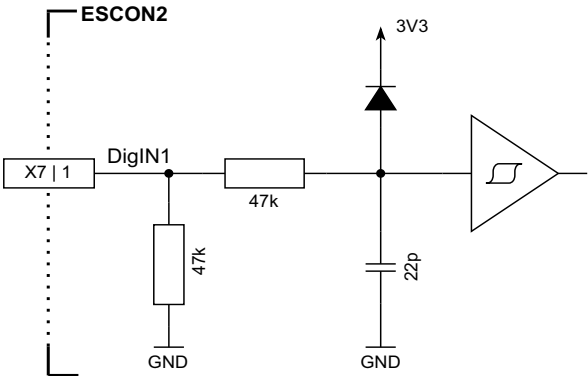


Figure 3-23 DigIN1 circuit (analogously valid for DigIN2)

Digital inputs 3...4	
Input voltage	0...25 VDC
Max. input voltage	±25 VDC
Low-level input voltage	< 0.8 VDC
High-level input voltage	> 2.1 VDC
Input resistance	typically 47 kΩ < 3.3 VDC typically 37 kΩ @ 5 VDC typically 25 kΩ @ 24 VDC
Input current at logic 1	typically 135 µA @ 5 VDC
Hardware switching delay	< 300 µs
Total reaction time	< 2.3 ms

Table 3-37 Digital inputs 3...4 specification

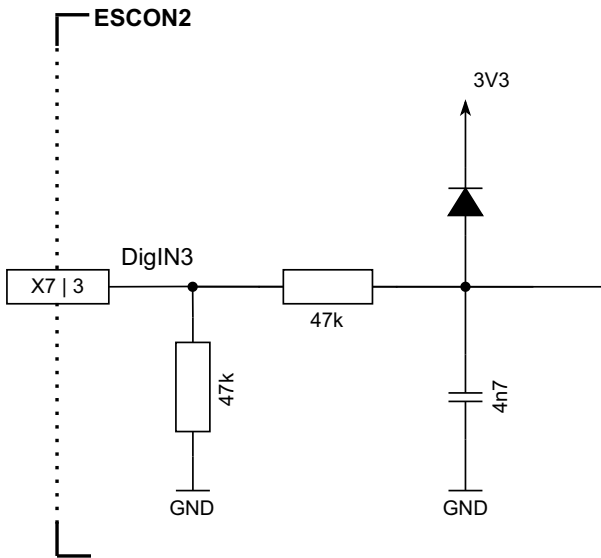


Figure 3-24 DigIN3 circuit (analogously valid for DigIN4)

Digital outputs 1...2 “sink”	
Max. input voltage	36 VDC
Max. load current	500 mA
Max. voltage drop	0.25 VDC @ 500 mA
Max. load inductance	100 mH @ 24 VDC; 500 mA with internal clamping typically 45 VDC
Max. output frequency	25 kHz

Table 3-38 Digital outputs specification – Sinks

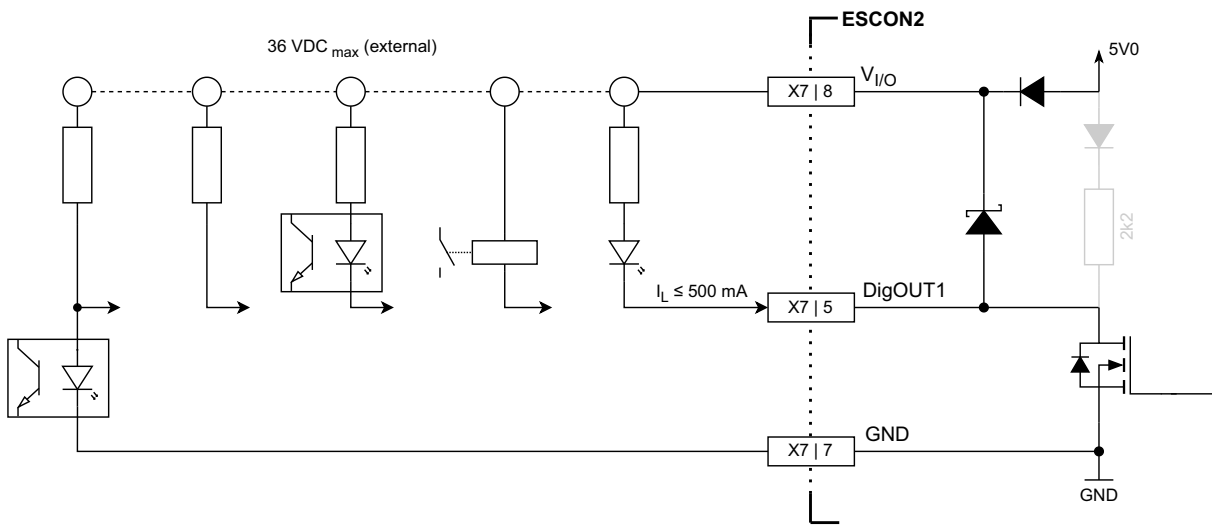


Figure 3-25 DigOUT1 “sinks” (analogously valid for DigOUT2)



WARNING

Freewheeling diode for inductive loads
If you operate inductive loads (for example, relays) with the digital output and do not use V_{I/O}, you must install a freewheeling diode. The diode prevents damage to the hardware. If possible, install the diode at the load.

Digital outputs 1...2 “source”	
Output voltage	$V_{\text{Out}} = 5 \text{ VDC} - 0.75 \text{ VDC} - (I_L \times 2'200 \Omega)$
Max. load current	$I_L \leq 2 \text{ mA}$

Table 3-39 Digital outputs specification – Sources

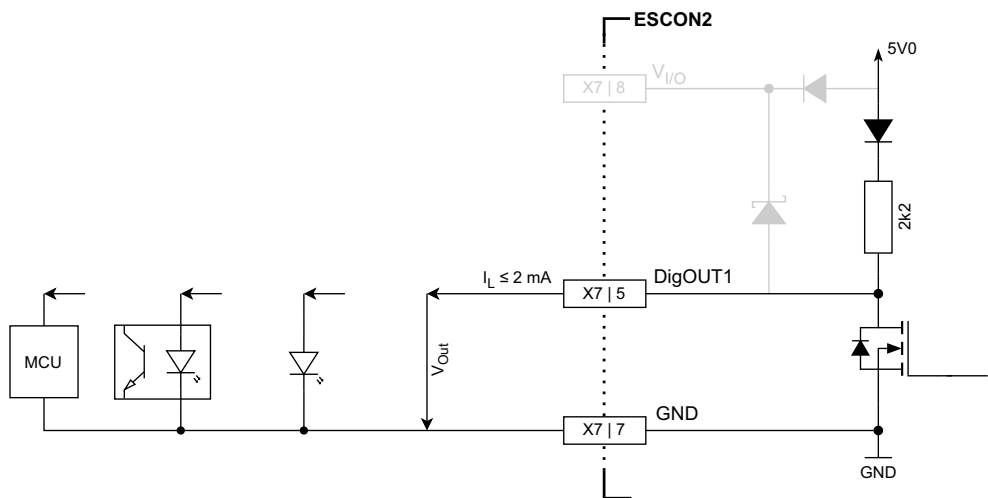


Figure 3-26 DigOUT1 “source” (analogously valid for DigOUT2)

3.3.7 Analog I/Os (X8)




Figure 3-27 Analog I/Os connector X8

X8 Pin	Prefab cable			Signal	Description
	Head A Pin	Cable color	Head B Pin		
1	1	white		AnIN1+	Analog input 1 positive signal
2	2	brown		AnIN1–	Analog input 1 negative signal
3	3	green		AnIN2+	Analog input 2 positive signal
4	4	yellow		AnIN2–	Analog input 2 negative signal
5	5	grey		AnOUT1	Analog output 1
6	6	pink		AnOUT2	Analog output 2
7	7	blue		GND	Ground

Table 3-40 Analog I/Os connector X8 – Pin assignment


Signal cable 7core (P/N 520854)		
<div><div>A</div></div>		<div><div>B</div></div>
Cross-section	7 × 0.14 mm ² , grey	
Length	3 m	
Head A	Plug	Molex CLIK-Mate, single row, 7 poles (5025780700)
	Contacts	Molex CLIK-Mate crimp terminals (5025790000)
Head B	Wire end sleeves 0.14 mm ²	

Table 3-41 Signal cable 7core

Analog inputs 1...2		
Input voltage		±10 VDC (differential)
Max. input voltage		±24 VDC
Common mode voltage		−5...+10 VDC (referenced to GND)
Input resistance	differential	80 kΩ
	referenced to GND	65 kΩ
A/D converter		12-bit
Resolution		5.64 mV
Bandwidth		10 kHz

Table 3-42 Analog input specification

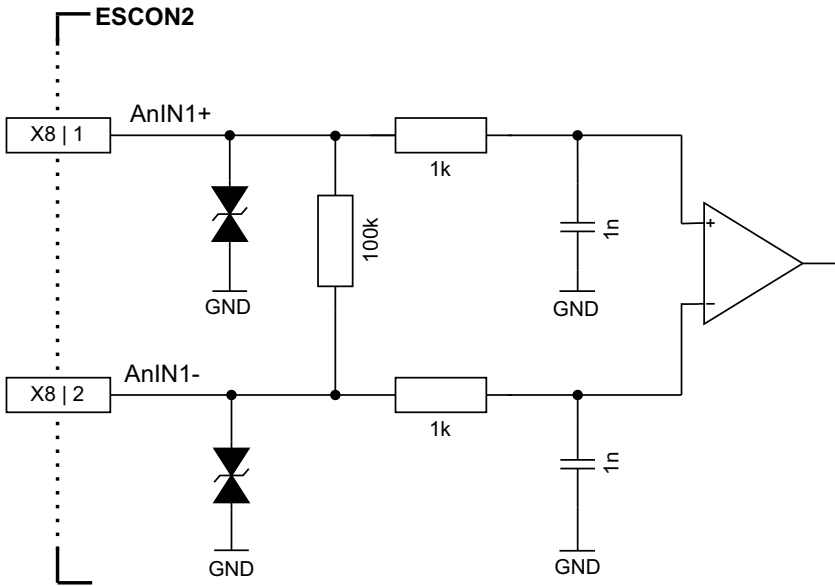


Figure 3-28 AnIN1 circuit (analogously valid for AnIN2)

Analog outputs 1...2	
Output voltage	±4 VDC
D/A converter	12-bit
Resolution	2.42 mV
Refresh rate	50 kHz
Analog bandwidth of output amplifier	25 kHz
Max. capacitive load	300 nF Note: The increase rate is limited in proportion to the capacitive load (e.g. 5 V/ms @ 300 nF)
Max. output current limit	1 mA

Table 3-43 Analog output specification

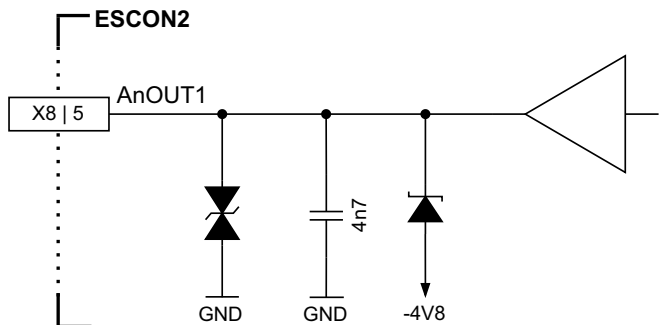


Figure 3-29 AnOUT1 circuit (analogously valid for AnOUT2)

3.3.8 RS232 (X10)




Figure 3-30 RS232 connector X10

X10 Pin	Prefab cable			Signal	Description
	Head A Pin	Cable color	Head B Pin		
1	1	white	3	RS232_RxD	RS232 receive
2	2	brown	5	GND	Ground
3	3	green	2	RS232_TxD	RS232 transmit
4	4	yellow	5	GND	Ground
5	5	Shield	Housing	Shield	Cable shield

Table 3-44 RS232 connector X10 – Pin assignment



RS232-COM cable (P/N 520856)		
<div><div><div>A</div><div>5 1</div></div><div><div>B</div><div>1 6</div></div></div>		
Cross-section	2 × 2 × 0.14 mm ² , twisted pair, shielded	
Length	3 m	
Head A	Plug	Molex CLIK-Mate, single row, 5 poles (5025780500)
	Contacts	Molex CLIK-Mate crimp terminals (502579)
Head B	Female D-Sub connector DIN 41652, 9 poles, with mounting screws	

Table 3-45 RS232-COM cable

RS232 interface	
Max. input voltage	±30 VDC
Output voltage	typically ±9 V @ 3 kΩ to GND
Max. bit rate	115'200 bit/s
RS232 transceiver	EIA RS232 standard

Table 3-46 RS232 interface specification



Bit rate setting

- Consider the master's maximal bit rate.
- The standard bit rate setting (factory setting) is 115'200 bit/s.

3.3.9 CAN 1 (X11) & CAN 2 (X12)

The ESCON2 is specially designed being commanded and controlled via a Controller Area Network (CAN), a highly efficient data bus very common in all fields of automation and motion control. It is preferably used as a slave node in the CANopen network.

For the CAN configuration check → Chapter “3.4 DIP switch configuration (SW1)” on page 3-42.




Figure 3-31 CAN 1 connector X11/CAN 2 connector X12

X11/12 Pin	Head A Pin	Prefab cable			Signal	Description
		Cable color	P/N 520858 Head B Pin	P/N 520857 Head B Pin		
1	1	white	1	7	CAN high	CAN bus high line
2	2	brown	2	2	CAN low	CAN bus low line
3	3	green	3	3	GND	Ground
4	4	yellow	4	5	CAN shield	Cable shield

Table 3-47 CAN 1 connector X11/CAN 2 connector X12 – Pin assignment



CAN-CAN cable (P/N 520858)		
<div>A</div> <div>B</div>		
Cross-section	2 × 2 × 0.14 mm ² , twisted pair, shielded	
Length	3 m	
Head A	Plug	Molex CLIK-Mate, single row, 4 poles (5025780400)
	Contacts	Molex CLIK-Mate crimp terminals (5025790000)
Head B	Plug	Molex CLIK-Mate, single row, 4 poles (5025780400)
	Contacts	Molex CLIK-Mate crimp terminals (5025790000)

Table 3-48 CAN-CAN cable



CAN-COM cable (P/N 520857)		
<div><div><div>A</div></div><div><div>B</div></div></div>		
Cross-section	2 × 2 × 0.14 mm ² , twisted pair, shielded	
Length	3 m	
Head A	Plug	Molex CLIK-Mate, single row, 4 poles (5025780400)
	Contacts	Molex CLIK-Mate crimp terminals (5025790000)
Head B	Female D-Sub connector DIN 41652 9 poles, with mounting screws	

Table 3-49 CAN-COM cable

CAN interface	
Standard	ISO 11898-2:2003
Max. bit rate	1 Mbit/s
Max. number of CAN nodes	31/127 (via hardware/software setting)
Protocol	CiA 301 version 4.2.0
Node-ID setting	By DIP switch or software

Table 3-50 CAN interface specification



Note

- Consider the CAN master's maximal bit rate.
- The standard bit rate setting (factory setting) is 1 Mbit/s.
- Use 120 Ω termination resistor at both ends of the CAN bus.
- For detailed CAN information see separate document → «ESCON2 Communication Guide».

3.3.10 USB (X13)



Hot plugging the USB interface may cause hardware damage

If the USB interface is being hot-plugged (connecting while the power supply is on), the possibly high potential differences of the two power supplies of controller and PC/Notebook can lead to damaged hardware.

- Avoid potential differences between the power supply of controller and PC/Notebook or, if possible, balance them.
- Insert the USB connector first, then switch on the power supply of the controller.




Figure 3-32 USB connector X13


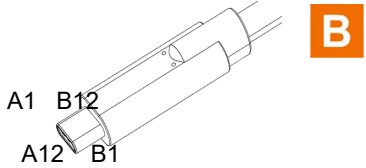
USB Type C - Type C cable (P/N 845854)	
 A1 B12 A12 B1	 A1 B12 A12 B1
USB standard	USB 3.2
Length	1.5 m
Head A	USB Type C
Head B	USB Type C

Table 3-51 USB Type C – Type C cable



USB Type A - Type C cable (P/N 838461)	
 A1 B12 A12 B1	 4 1
USB standard	USB 2.0 / USB 3.0
Length	1.5 m
Head A	USB Type C
Head B	USB Type A

Table 3-52 USB Type A – Type C cable

USB	
Data signaling rate	12 Mbit/s (Full speed)
Max. bus supply voltage V_{Bus}	5.25 VDC
Max. DC data input voltage	-0.3...+3.8 VDC

Table 3-53 USB interface specification

3.3.11 **Motor temperature sensor (X16) (future release)**

The functionality will only be available with a future firmware release.




Figure 3-33 Motor temperature sensor connector X16

X16 Pin	Prefab cable			Signal	Description
	Head A Pin	Cable color	Head B Pin		
1	1	black		GND	Ground
2	2	red		MotorTemp	Motor temperature sensor input

Table 3-54 Motor temperature sensor connector X16 – Pin assignment


NTC cable (P/N 847301)		
<div><div>A</div><div>B</div></div>		
Cross-section	2 × 0.5 mm ² , grey	
Length	3 m	
Head A	Plug	Molex Micro-Fit 3.0, 2 poles (430250200)
	Contacts	Molex Micro-Fit 3.0 female crimp terminals (0430300001)
Head B	Wire end sleeves 0.5 mm ²	

Table 3-55 NTC cable

Motor temperature sensor input	
Input voltage	0...3.3 VDC
Max. input voltage	+24 VDC
A/D converter	12-bit
Internal pull-up resistor	3.3 kΩ (referenced to 3.3 VDC)

Table 3-56 Motor temperature sensor – specifications

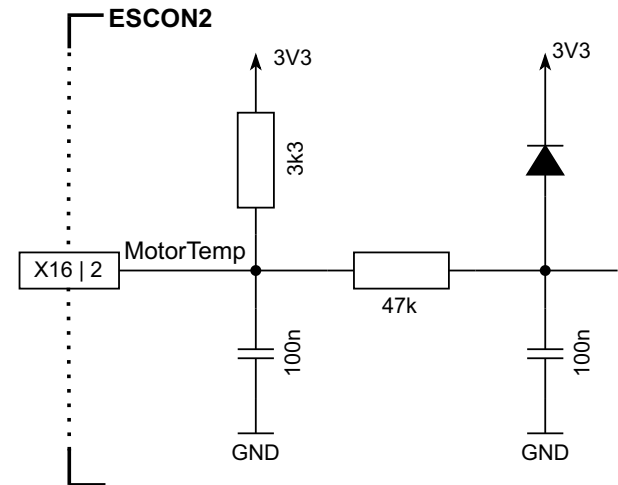


Figure 3-34 Motor temperature circuit

3.4 DIP switch configuration (SW1)

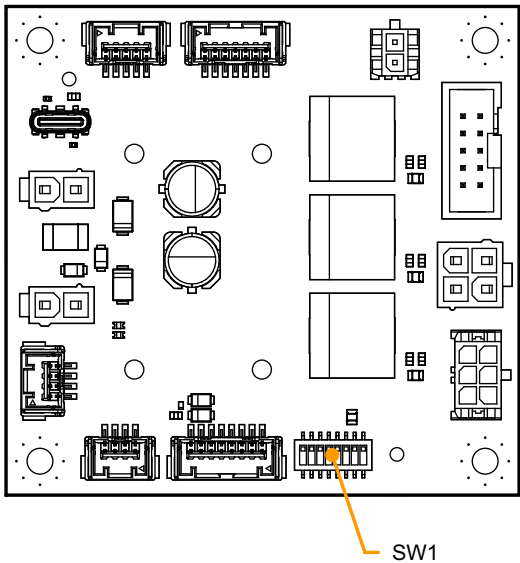


Figure 3-35 DIP switch SW1



DIP switch 8 has no functionality assigned and is not connected.

3.4.1 CAN ID (Node-ID)

The device’s identification (subsequently called “ID”) can be set by means of DIP switches 1...5 or software using binary code.



Setting the ID by DIP switch SW1

- DIP switches 6...8 do not have any impact on the ID.

Setting	Switch	Binary Code	Valence
<div><div><div>18</div><div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div>ON</div><div>OFF</div></div><div>(factory setting)</div></div></div>	1	2 ⁰	1
	2	2 ¹	2
	3	2 ²	4
	4	2 ³	8
	5	2 ⁴	16

Table 3-57 DIP switch SW1 – Binary code values

Continued on next page.

The set ID can be observed by adding the valence of all activated switches. Use the following table as a (non-concluding) guide:









Setting	Switch					ID
	1	2	3	4	5	
 ON OFF	0	0	0	0	0	–
 ON OFF	1	0	0	0	0	1
 ON OFF	0	1	0	0	0	2
 ON OFF	0	0	1	0	0	4
 ON OFF	1	0	1	0	0	5
 ON OFF	0	0	0	1	0	8
 ON OFF	0	0	0	0	1	16
 ON OFF	1	1	1	1	1	31
0 = Switch "OFF" 1 = Switch "ON"						

Table 3-58 DIP switch SW1 – Examples

SETTING THE ID BY MEANS OF «MOTION STUDIO»

- The ID may be set by software (changing object 0x2000 «Node-ID», range 1...127).
- The ID set by software is valid if the ID is set to "0" (DIP switches 1...5 set to OFF).

3.4.2 CAN automatic bit rate detection

With this function, the CANopen interface can be put in a “listen only” mode. For further details see separate document ➔ «ESCON2 Firmware Specification». Automatic bit rate detection is activated with DIP switch 6.



Switch	OFF	ON
6	 Automatic bit rate detection deactivated	 Automatic bit rate detection activated (factory setting)

Table 3-59 DIP switch SW1 – CAN automatic bit rate detection

3.4.3 CAN bus termination

A 120 Ω termination resistor can be "activated" with DIP switch 7.



Switch	OFF	ON
7	 Without bus termination (factory setting)	 Bus termination with 120 Ω

Table 3-60 DIP switch SW1 – CAN bus termination

3.5 Status indicators

The Evaluation Board features a set of LED indicators to display the controller's condition.

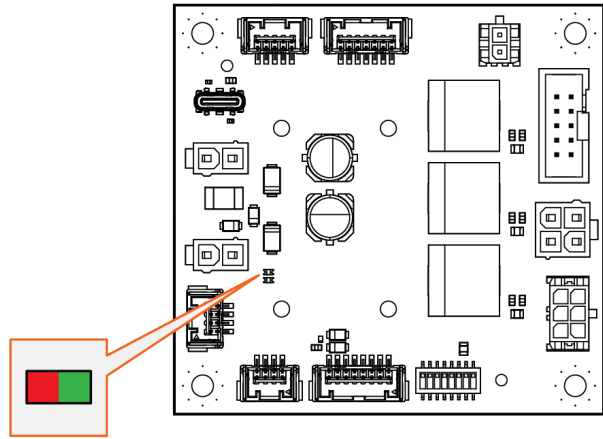


Figure 3-36 LEDs – Location

The LEDs display the actual status and possible warnings and errors of the ESCON2:

- Green LED shows the operation status
- Red LED indicates warnings and errors

LED		Warning / Error	Description
Green	Red		
Slow	OFF	No warning/error active.	Power stage is disabled. The ESCON2 is in status <ul style="list-style-type: none">• Switch on disabled• Ready to switch on• Switched on
Slow	Slow	At least one warning is active.	
ON	OFF	No warning/error active.	Power stage is enabled. The ESCON2 is in status <ul style="list-style-type: none">• Operation enabled• Quick stop active
ON	Slow	At least one warning is active.	
ON	ON	At least one error has occurred.	Power stage is enabled. The ESCON2 is in temporary status <ul style="list-style-type: none">• Fault reaction active
OFF	ON	At least one error has occurred.	Power stage is disabled. The ESCON2 is in status <ul style="list-style-type: none">• Fault
Flash	ON	n/a	Firmware update in progress or invalid application
Slow = LED is slowly blinking (0.5 s OFF, 0.5 s ON) Flash = LED is flashing (0.9 s OFF, 0.1 s ON)			

Table 3-61 Device status LEDs

••page intentionally left blank••

4 WIRING

This section provides wiring information for your setup. You can either use the consolidated wiring diagrams (see →Figure 4-38) featuring the full scope of interconnectivity and pin assignments, or you may use the connection overviews for either DC motor or EC (BLDC) motor to determine the wiring for your particular motor type and the appropriate feedback signals.

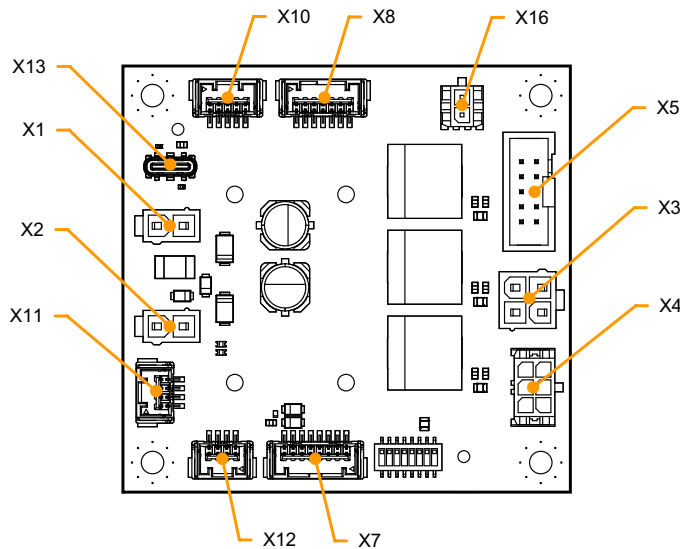



Figure 4-37 Interfaces – Designations and location



Signs and abbreviations used

The subsequent diagrams feature these signs and abbreviations:

- «EC motor» stands for brushless EC motor (BLDC).
-  Ground safety earth connection (optional).

4.1 Possible combinations to connect a motor

The following tables show feasible ways to connect the motor with its respective feedback signals or possible combinations thereof. To find the wiring that best suits your setup, proceed as follows:

- 1) Decide on the type of motor you are using and go to the respective subsection; →Chapter “4.1.1 DC motor” on page 4-48 or →Chapter “4.1.2 EC (BLDC) motor” on page 4-48.
- 2) Connect the power supply and the logic supply as shown in the referenced figure.
- 3) Check-out the listing for the combination that best suits your setup. Pick the wiring method # and go to the respective table; for DC motor see →Table 4-62, for EC (BLDC) motor see →Table 4-63.
- 4) Pick the row with the corresponding wiring method # and refer to the listed figure(s) to find the relevant wiring information.

4.1.1 DC motor

Power supply

Power supply and optional logic supply Figure 4-39 / Figure 4-40

Motor & feedback signals

Without sensor Method # DC1 [a]

Digital incremental encoder Method # DC2

SSI / BiSS C unidirectional absolute encoder Method # DC3 [b]

Method #	Sensor 2		→Figure(s)
	Digital incremental encoder	SSI / BiSS C unidirectional absolute encoder [b]	
DC1 [a]			4-41
DC2	✓		4-41 4-44
DC3 [b]		✓	4-41 4-45

[a] For method # DC1, only the operating mode current control can be used.

[b] The functionality will be available with a future firmware release.

Table 4-62 Possible combinations of feedback signals for DC motor

4.1.2 EC (BLDC) motor

Power supply

Power supply and optional logic supply Figure 4-39 / Figure 4-40

Motor & feedback signals

Hall sensors Method # EC1

Hall sensors & Digital incremental encoder Method # EC2

Hall sensors & SSI / BiSS C unidirectional absolute encoder Method # EC3 [a]

SSI / BiSS C unidirectional absolute encoder Method # EC4 [a]

Method #	Sensor 1	Sensor 2		→Figure(s)
	Hall sensors	Digital incremental encoder	SSI / BiSS C unidirectional absolute encoder [a]	
EC1	✓			4-42 4-43
EC2	✓	✓		4-42 4-43 4-44
EC3 [a]	✓		✓	4-42 4-43 4-45
EC4 [a]			✓	4-42 4-45

[a] The functionality will be available with a future firmware release.

Table 4-63 Possible combinations of feedback signals for EC (BLDC) motor

4.2 Main wiring diagram

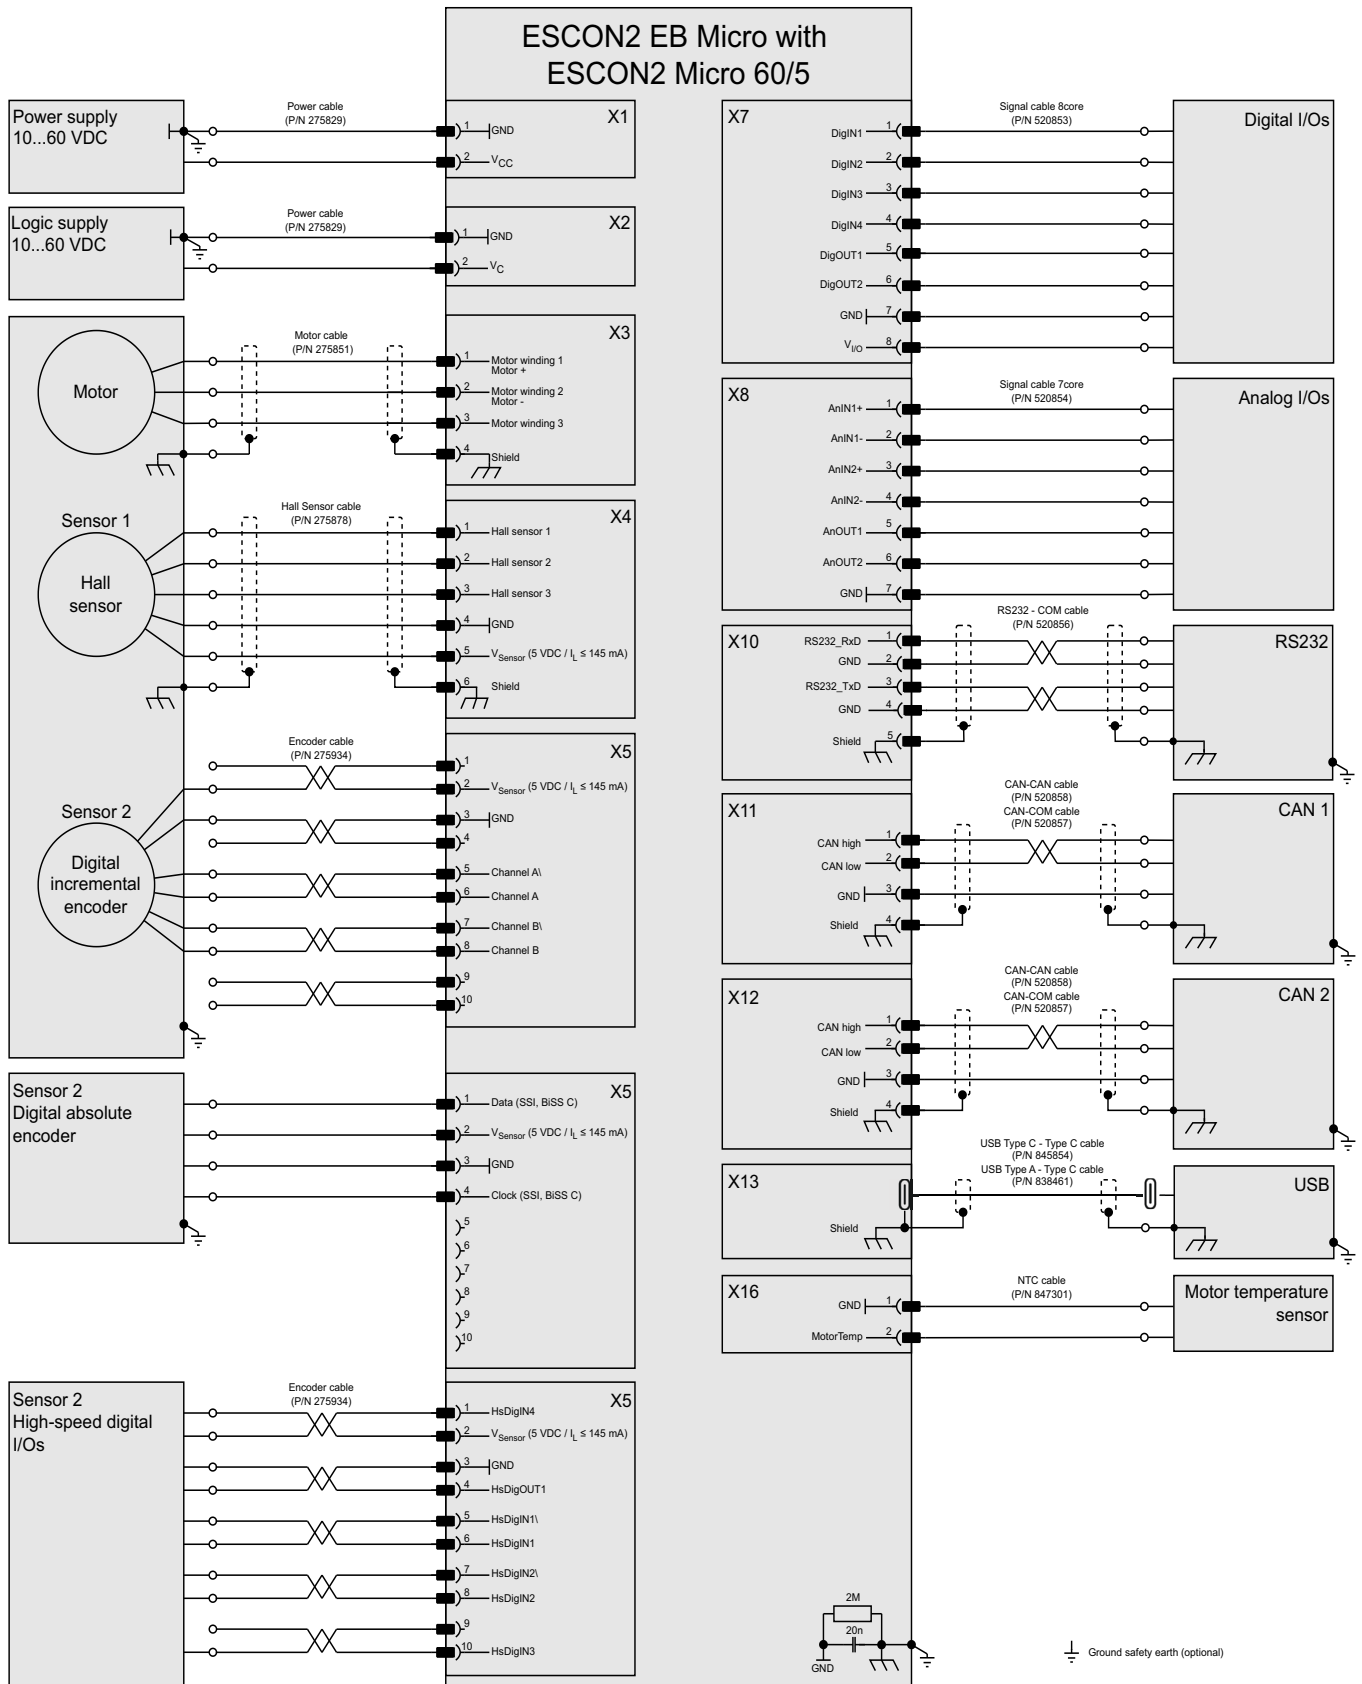


Figure 4-38 Main wiring diagram

4.3 Excerpts

4.3.1 Power supply

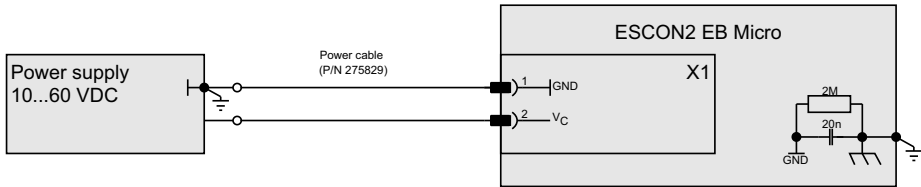


Figure 4-39 Power supply

4.3.2 Logic supply

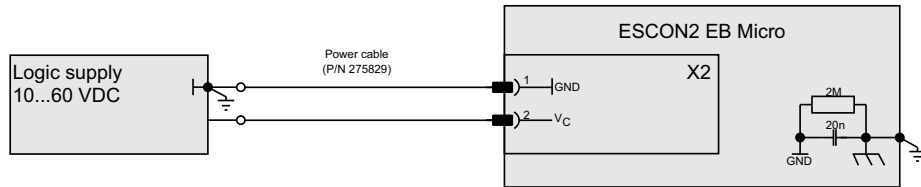


Figure 4-40 Logic supply

4.3.3 DC motor

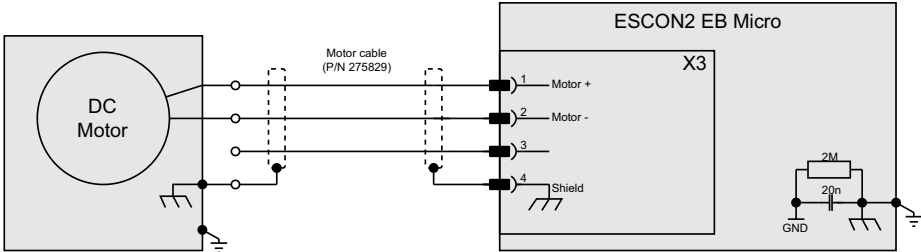


Figure 4-41 DC motor

4.3.4 EC (BLDC) motor

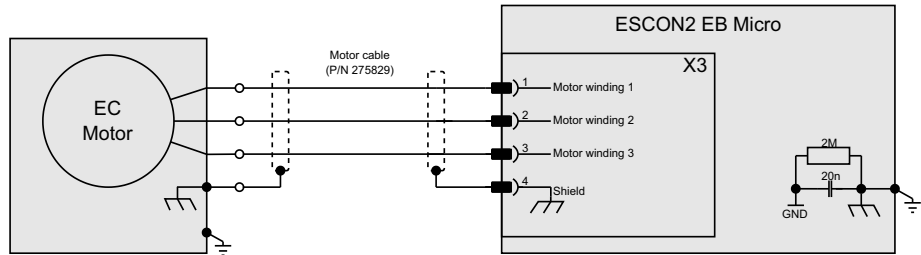


Figure 4-42 EC (BLDC) motor

4.3.5 Sensor 1 Hall sensor

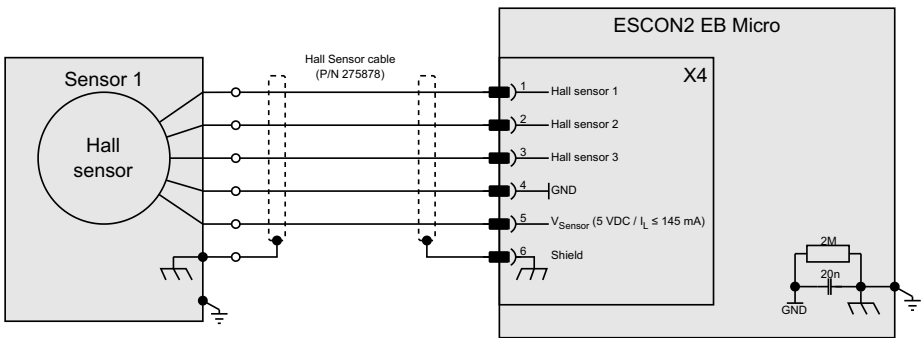


Figure 4-43 Sensor 1 Hall sensor

4.3.6 Sensor 2 Encoder / I/Os

4.3.6.1 Digital incremental encoder

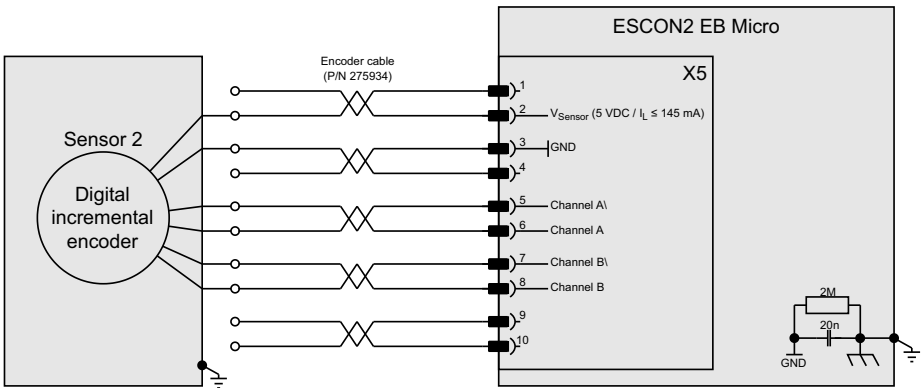


Figure 4-44 Digital incremental encoder

This interface can handle a digital incremental encoder, an SSI / BiSS C digital unidirectional absolute encoder or high-speed digital I/O's. Only one out of these three functions can be used at the same time.

4.3.6.2 SSI / BiSS C unidirectional absolute encoder (future release)

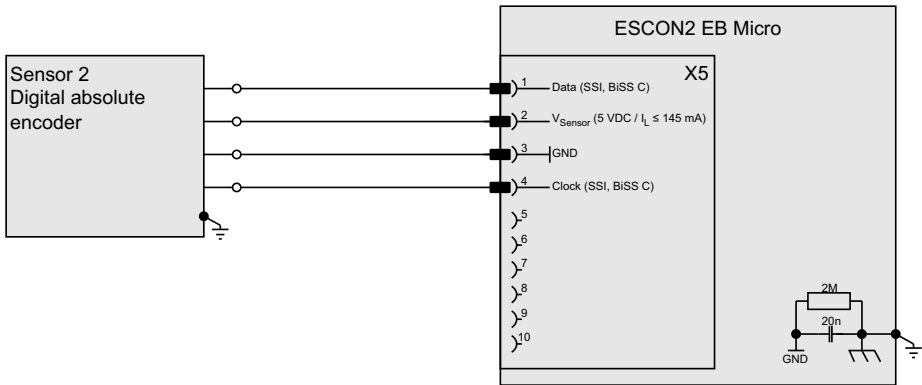


Figure 4-45 SSI / BiSS C unidirectional absolute encoder

This interface can handle a digital incremental encoder, an SSI / BiSS C digital unidirectional absolute encoder or high-speed digital I/O's. Only one out of these three functions can be used at the same time.

4.3.6.3
High-speed digital I/Os

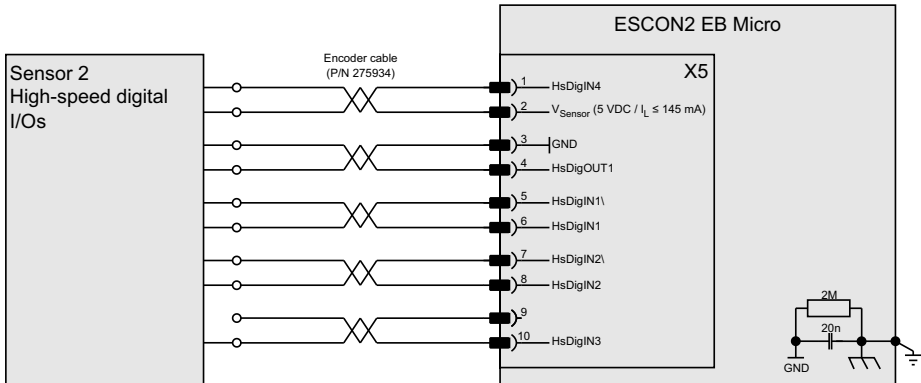


Figure 4-46
High-speed digital I/Os

This interface can handle a digital incremental encoder, an SSI / BiSS C digital unidirectional absolute encoder or high-speed digital I/O's. Only one out of these three functions can be used at the same time.

4.3.7
Digital I/Os

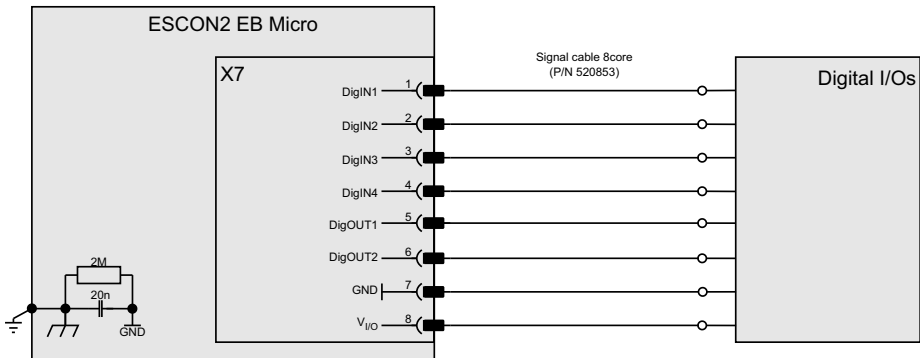


Figure 4-47
Digital I/Os

4.3.8
Analog I/Os

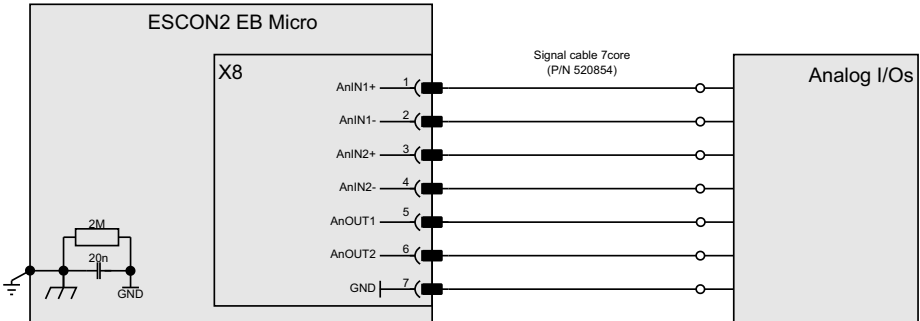


Figure 4-48
Analog I/Os

4.3.9 RS232

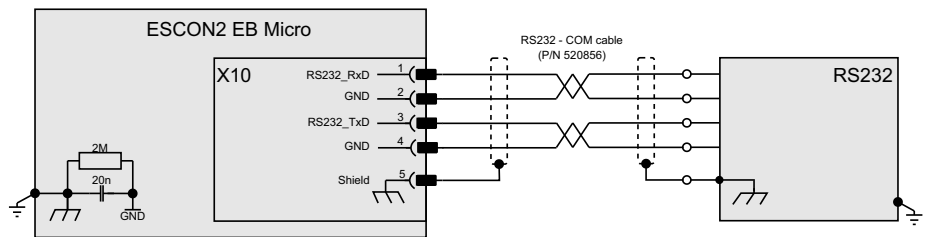


Figure 4-49 RS232

4.3.10 CAN

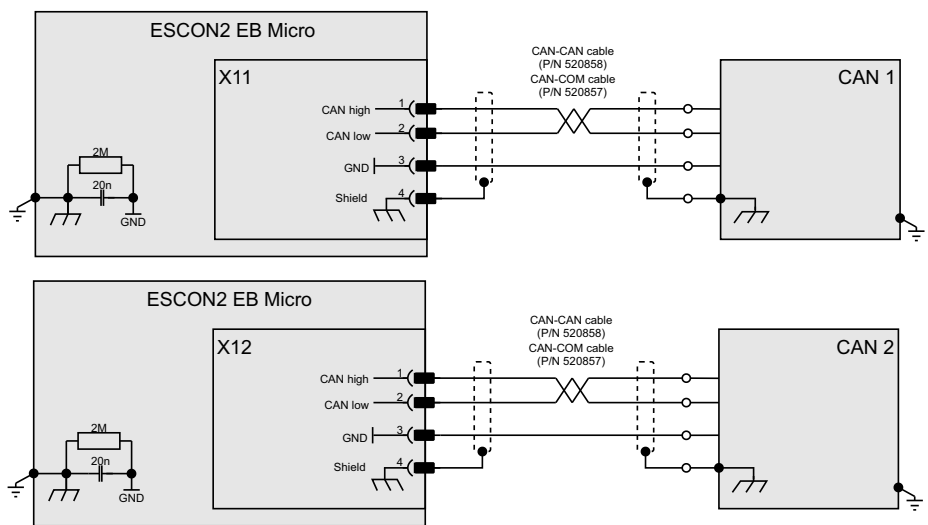


Figure 4-50 CAN

Depending on the preferred interface, one of the two prefab CAN cables can be used.

4.3.11 USB

4.3.11.1 USB-C

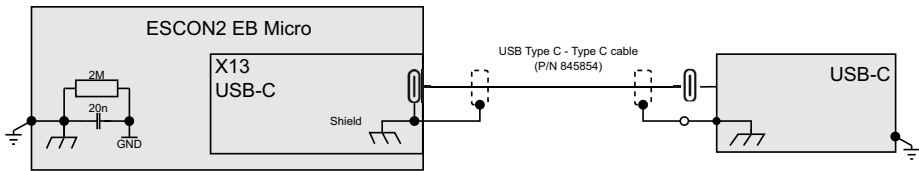


Figure 4-51 USB-C

4.3.11.2 USB-A

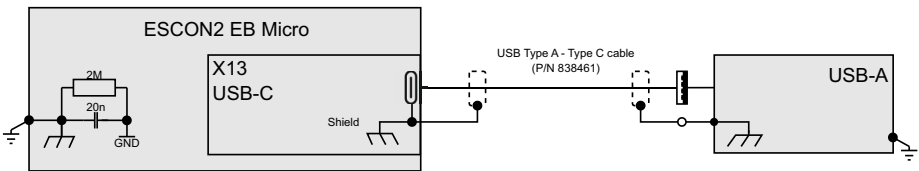


Figure 4-52 USB-A

4.3.12 Motor temperature sensor (future release)

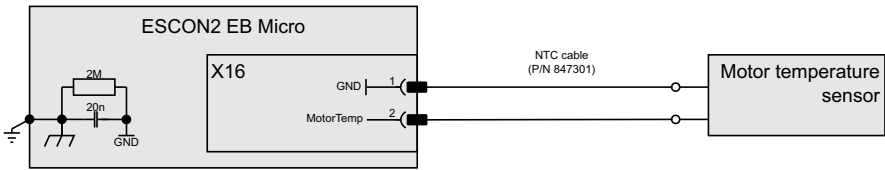


Figure 4-53 Motor temperature sensor

LIST OF FIGURES

Figure 1-1	Documentation structure	5
Figure 2-2	Derating of output current (operation without additional heatsink)	11
Figure 2-3	Extended operation @ VCC 60 VDC with additional heatsink	12
Figure 2-4	Assembly with thermal accessories	13
Figure 2-5	Power dissipation and efficiency	13
Figure 2-6	Dimensional drawing [mm]	14
Figure 3-7	Connections	18
Figure 3-8	Power supply connector X1.	20
Figure 3-9	Logic supply connector X2	21
Figure 3-10	Motor connector X3.	22
Figure 3-11	Sensor 1 Hall sensor connector X4.	23
Figure 3-12	Sensor 1 Hall sensor input circuit (analogously valid for Hall sensors 2 & 3)	24
Figure 3-13	Sensor 2 connector X5	25
Figure 3-14	Digital incremental encoder input circuit Ch A “differential” (analogously valid for Ch B)	26
Figure 3-15	Digital incremental encoder input circuit Ch A “single-ended” (analogously valid for Ch B)	27
Figure 3-16	SSI absolute encoder data input (analogously valid for BiSS C)	28
Figure 3-17	SSI absolute encoder clock output (analogously valid for BiSS C)	28
Figure 3-18	HsDigIN1 circuit “differential” (analogously valid for HsDigIN2)	29
Figure 3-19	HsDigIN1 circuit “single-ended” (analogously valid for HsDigIN2...3)	30
Figure 3-20	HsDigIN4 circuit “single-ended”	31
Figure 3-21	HsDigOUT1 circuit.	31
Figure 3-22	Digital I/Os connector X7.	31
Figure 3-23	DigIN1 circuit (analogously valid for DigIN2).	33
Figure 3-24	DigIN3 circuit (analogously valid for DigIN4).	33
Figure 3-25	DigOUT1 “sinks” (analogously valid for DigOUT2)	34
Figure 3-26	DigOUT1 “source” (analogously valid for DigOUT2).	34
Figure 3-27	Analog I/Os connector X8	35
Figure 3-28	AnIN1 circuit (analogously valid for AnIN2).	36
Figure 3-29	AnOUT1 circuit (analogously valid for AnOUT2).	36
Figure 3-30	RS232 connector X10	37
Figure 3-31	CAN 1 connector X11/CAN 2 connector X12	38
Figure 3-32	USB connector X13.	39
Figure 3-33	Motor temperature sensor connector X16.	40
Figure 3-34	Motor temperature circuit	41
Figure 3-35	DIP switch SW1.	42
Figure 3-36	LEDs – Location	44
Figure 4-37	Interfaces – Designations and location	47
Figure 4-38	Main wiring diagram	49
Figure 4-39	Power supply.	50
Figure 4-40	Logic supply	50
Figure 4-41	DC motor.	50

Figure 4-42 EC (BLDC) motor50

Figure 4-43 Sensor 1 Hall sensor51

Figure 4-44 Digital incremental encoder51

Figure 4-45 SSI / BiSS C unidirectional absolute encoder51

Figure 4-46 High-speed digital I/Os52

Figure 4-47 Digital I/Os52

Figure 4-48 Analog I/Os52

Figure 4-49 RS23253

Figure 4-50 CAN53

Figure 4-51 USB-C54

Figure 4-52 USB-A54

Figure 4-53 Motor temperature sensor54

LIST OF TABLES

Table 1-1	Notations used in this document	6
Table 1-2	Symbols and signs	6
Table 1-3	Brand names and trademark owners	7
Table 2-4	Technical data	10
Table 2-5	Heatsink – tested components	12
Table 2-6	Thermal accessories – specification	12
Table 2-7	Limitations and protections	14
Table 2-8	Standards	15
Table 3-9	Prefab maxon cables.	19
Table 3-10	Motion connector set – Content	19
Table 3-11	Recommended tools	19
Table 3-12	Power supply connector X1 – Pin assignment	20
Table 3-13	Power cable.	20
Table 3-14	Power supply requirements.	20
Table 3-15	Logic supply connector X2 – Pin assignment	21
Table 3-16	Power cable.	22
Table 3-17	Logic supply requirements	22
Table 3-18	Motor connector X3 – Pin assignment for maxon EC & DC motor	22
Table 3-19	Motor cable	23
Table 3-20	Hall sensor connector X4 – Pin assignment	23
Table 3-21	Hall sensor cable.	23
Table 3-22	Sensor 1 Hall sensor specification	24
Table 3-23	Sensor 2 connector X5 – Pin assignment.	25
Table 3-24	Encoder cable	25
Table 3-25	Differential digital incremental encoder specification	26
Table 3-26	Single-ended digital incremental encoder specification	27
Table 3-27	SSI / BiSS C unidirectional absolute encoder specification	27
Table 3-28	Single-ended SSI / BiSS C unidirectional absolute encoder data channel specification.	28
Table 3-29	Single-ended SSI / BiSS C unidirectional absolute encoder clock channel specification	28
Table 3-30	Encoder cable	29
Table 3-31	Differential high-speed digital input specification	29
Table 3-32	Single-ended high-speed digital input specification	30
Table 3-33	High-speed digital output specification	31
Table 3-34	Digital I/Os connector X7 – Pin assignment	32
Table 3-35	Signal cable 8core.	32
Table 3-36	Digital inputs 1...2 specification.	32
Table 3-37	Digital inputs 3...4 specification.	33
Table 3-38	Digital outputs specification – Sinks	34
Table 3-39	Digital outputs specification – Sources	34
Table 3-40	Analog I/Os connector X8 – Pin assignment.	35
Table 3-41	Signal cable 7core.	35

Table 3-42	Analog input specification	35
Table 3-43	Analog output specification	36
Table 3-44	RS232 connector X10 – Pin assignment	37
Table 3-45	RS232-COM cable	37
Table 3-46	RS232 interface specification	37
Table 3-47	CAN 1 connector X11/CAN 2 connector X12 – Pin assignment	38
Table 3-48	CAN-CAN cable	38
Table 3-49	CAN-COM cable	38
Table 3-50	CAN interface specification	39
Table 3-51	USB Type C – Type C cable	39
Table 3-52	USB Type A – Type C cable	40
Table 3-53	USB interface specification	40
Table 3-54	Motor temperature sensor connector X16 – Pin assignment	40
Table 3-55	NTC cable	41
Table 3-56	Motor temperature sensor – specifications	41
Table 3-57	DIP switch SW1 – Binary code values	42
Table 3-58	DIP switch SW1 – Examples	43
Table 3-59	DIP switch SW1 – CAN automatic bit rate detection	44
Table 3-60	DIP switch SW1 – CAN bus termination	44
Table 3-61	Device status LEDs	45
Table 4-62	Possible combinations of feedback signals for DC motor	48
Table 4-63	Possible combinations of feedback signals for EC (BLDC) motor	48

INDEX

A

alerts 6
analog inputs 35
analog outputs 36
applicable EU directive 17

B

bit rate detection 44
bit rate, default 37, 39

C

cables (prefab)
 CAN-CAN cable 38
 CAN-COM cable 38
 Encoder cable 25, 29
 Hall sensor cable 23
 Motor cable 23
 NTC cable 41
 Power cable 20, 22
 RS232-COM cable 37
 Signal cable 7core 35
 Signal cable 8core 32
 USB Type A - Type C cable 40
 USB Type C - Type C cable 39
CAN bus termination 39, 44
CAN ID 42
CAN interface 39
codes (used in this document) 6
Connections 18
connector
 motor temperature sensor 40
connectors
 X1 20
 X10 37
 X11 38
 X12 38
 X13 39
 X16 40
 X2 21
 X3 22
 X4 23
 X5 24
 X7 31
 X8 35
controller's 44
country-specific regulations 8

D

digital high-speed inputs (differential) 29
digital high-speed inputs (single-ended) 30
digital high-speed output 31
digital incremental encoder (differential) 26
digital incremental encoder (single-ended) 27
digital inputs 32, 33
digital outputs 34
DIP switch SW1 42

E

encoders
 absolute 27
 absolute (single-ended) 27
 incremental 26
ESD 8
EU directive, applicable 17

H

Hall sensor 24
how to
 calculate the required supply voltage 21
 interpret icons (and signs) used in this document 6

I

ID (of the device) 42
incorporation into surrounding system 17
informatory signs 6
inputs
 analog 35
 digital 32, 33
 high-speed digital 29
interfaces
 CAN 1 38
 CAN 2 38
 location and designation 47
 RS232 37
 USB 39, 40
 USB type A 40
 USB Type C 39
 USB type C 40

L

LED 44

M

mandatory action signs 6
Motion connector set 19

N

notations (used in this document) 6

O

operating license 17
outputs
 analog 36
 digital 34
 high-speed digital 31

P

part numbers
 275829 20, 22
 275851 23
 275878 23
 275934 25, 29

520853 32
520854 35
520856 37
520857 38
520858 38
809631 7, 9, 10, 12
809646 9, 10
838461 40
841890 12
845854 39
846644 19
847301 41

performance data 9

precautions 8

prerequisites prior installation 17

prohibitive signs 6

protective measures (ESD) 8

purpose

of the device 7

of the document 5

R

regulations, applicable 8

S

safety alerts 6

safety first! 8

serial encoder 27

signs used 6

SSI absolute encoder 27

standards, fulfilled 15

status LEDs 44

supply voltage, required 21

SW1 42

symbols used 6

T

technical data 9

termination (CAN bus) 39, 44

U

USB port 39

W

wiring examples

Analog I/Os 52

CAN-CAN / CAN-COM cable 53

DC motor 50

Digital I/Os 52

Digital incremental encoder 51

EC (BLDC) motor 50

High-speed digital I/Os 52

Logic supply 50

Motor temperature sensor 54

Power supply 50

RS232 (future release) 53

Sensor 1 Hall sensor 51

Sensor 2 encoder I/Os 51

SSI / BiSS C absolute encoder 51

USB-A 54

USB-C 54

••page intentionally left blank••

